

GOVERNMENT OF ANDHRA PRADESH
RURAL WATER SUPPLY AND SANITATION DEPARTMENT
O/o Engineer-in-Chief, RWS&S, Vijayawada

From

Smt. T. Gayatri Devi, B.Tech
Engineer-in-Chief,
RWS&S Department,
Gollapudi, Vijayawada.

To

The Managing Director,
Swachha Andhra Corporation
Vijayawada

Lr. No. AEE/ DEE/SBM /CSC/2025-26, Dt. 29.05.2025

Sir,

Sub: SBM-Revised Estimate Cost for Construction of Community Sanitary Complex-
Sanction-Proposed by the SEs/DREOs-Proposal submissions to MD SAC-
Requested for revision-Reg.

Ref:

1. G.O.Rt.No. 412 Dated: 17.07.2020 of the PR & RD (RWS-I) Dept.
2. Lr. No. AEE/SBM/CSC/Revised Estimate Cost/2025 Dt. 05.02.2025 addressed to the MD, SAC, Vijayawada
3. Lr. No. C/SBM(G)/Accountant/CSC/Revised District/2025 Dt. 07.04.2025 of the District Collector, SPSR Nellore addressed to the MD, SAC, Vijayawada
4. Representations from all the SEs/DREOs, RWS&S in the State.
5. Video Conference held by the MD, SAC & Chief Engineer, RWS&S with all the SEs, RWS&S in the State on 20.05.2025
6. T/o Lr. No. AEE/ DEE/SBM /CSC/2025-26, Dt. 29.05.2025
7. Instructions given by MD, SAC in the Meeting held at Swachha Andhra Corporation, Vijayawada Dt:28.05.2025

In continuation to the ref. 5th cited, the Managing Director, SAC have instructed to revise the design and to provide One Urinal and Western Water Closet for Gents and Two separate Toilets for women (One Indian and One Western closet) and to limit the Estimate Cost for Rs. 3.00 Lakhs Only.

As such, the revised design to size of **2.70 M x 2.70 M** (Drawing Enclosed) for Construction of balance CSCs of Rs. 3.00 Lakhs is here with proposed without causing additional burden to the Government. All the remaining provisions like ramps, water supply, electrical facilities, Swachh Bharat Mission Logo on walls shall be followed as per the Original Design as per the site Conditions.


Encl: As above.

Yours Faithfully,


Engineer-in-Chief,
RWS&S, Vijayawada

 29/5/25  29/5/25  29/5/25

Figure: Community Sanitary Complex @Grama Sachivalayam

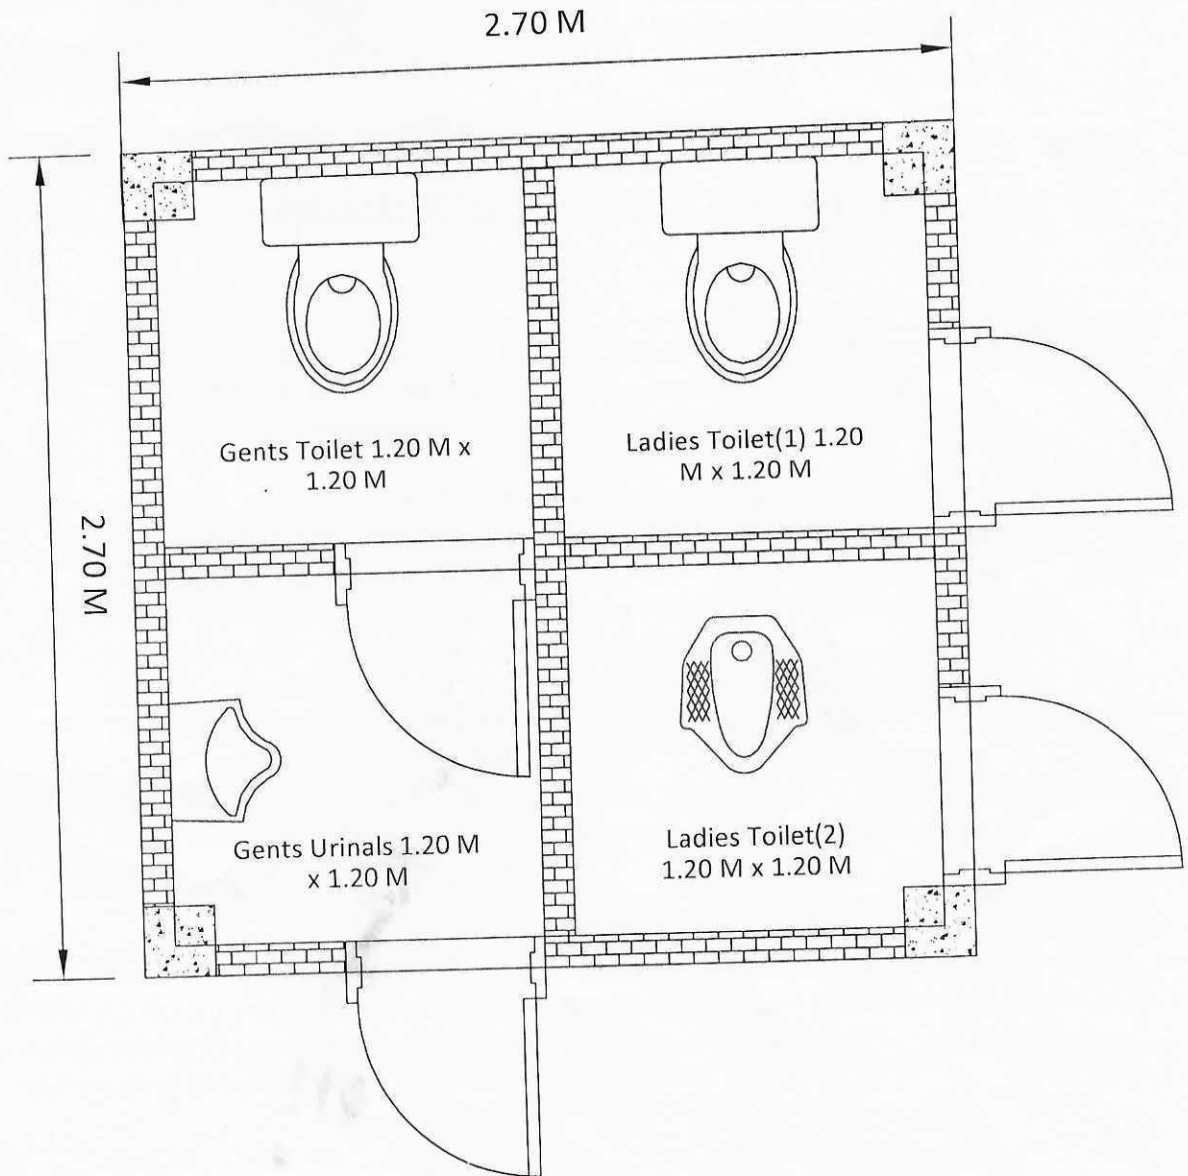

Note:

RCC Columns Size : 0.23 M x 0.23 M

BrickWall Thickness : 0.10 M

Wall Tiles Height : 0.50 M

Ramp, Water & Light, Swachh Bharat Mission Logo to be provided.


 Chief Engineer,
 BPD APDUSC
 28/5/25
 29/5/25
 29/5/25

