325 KL SUMP

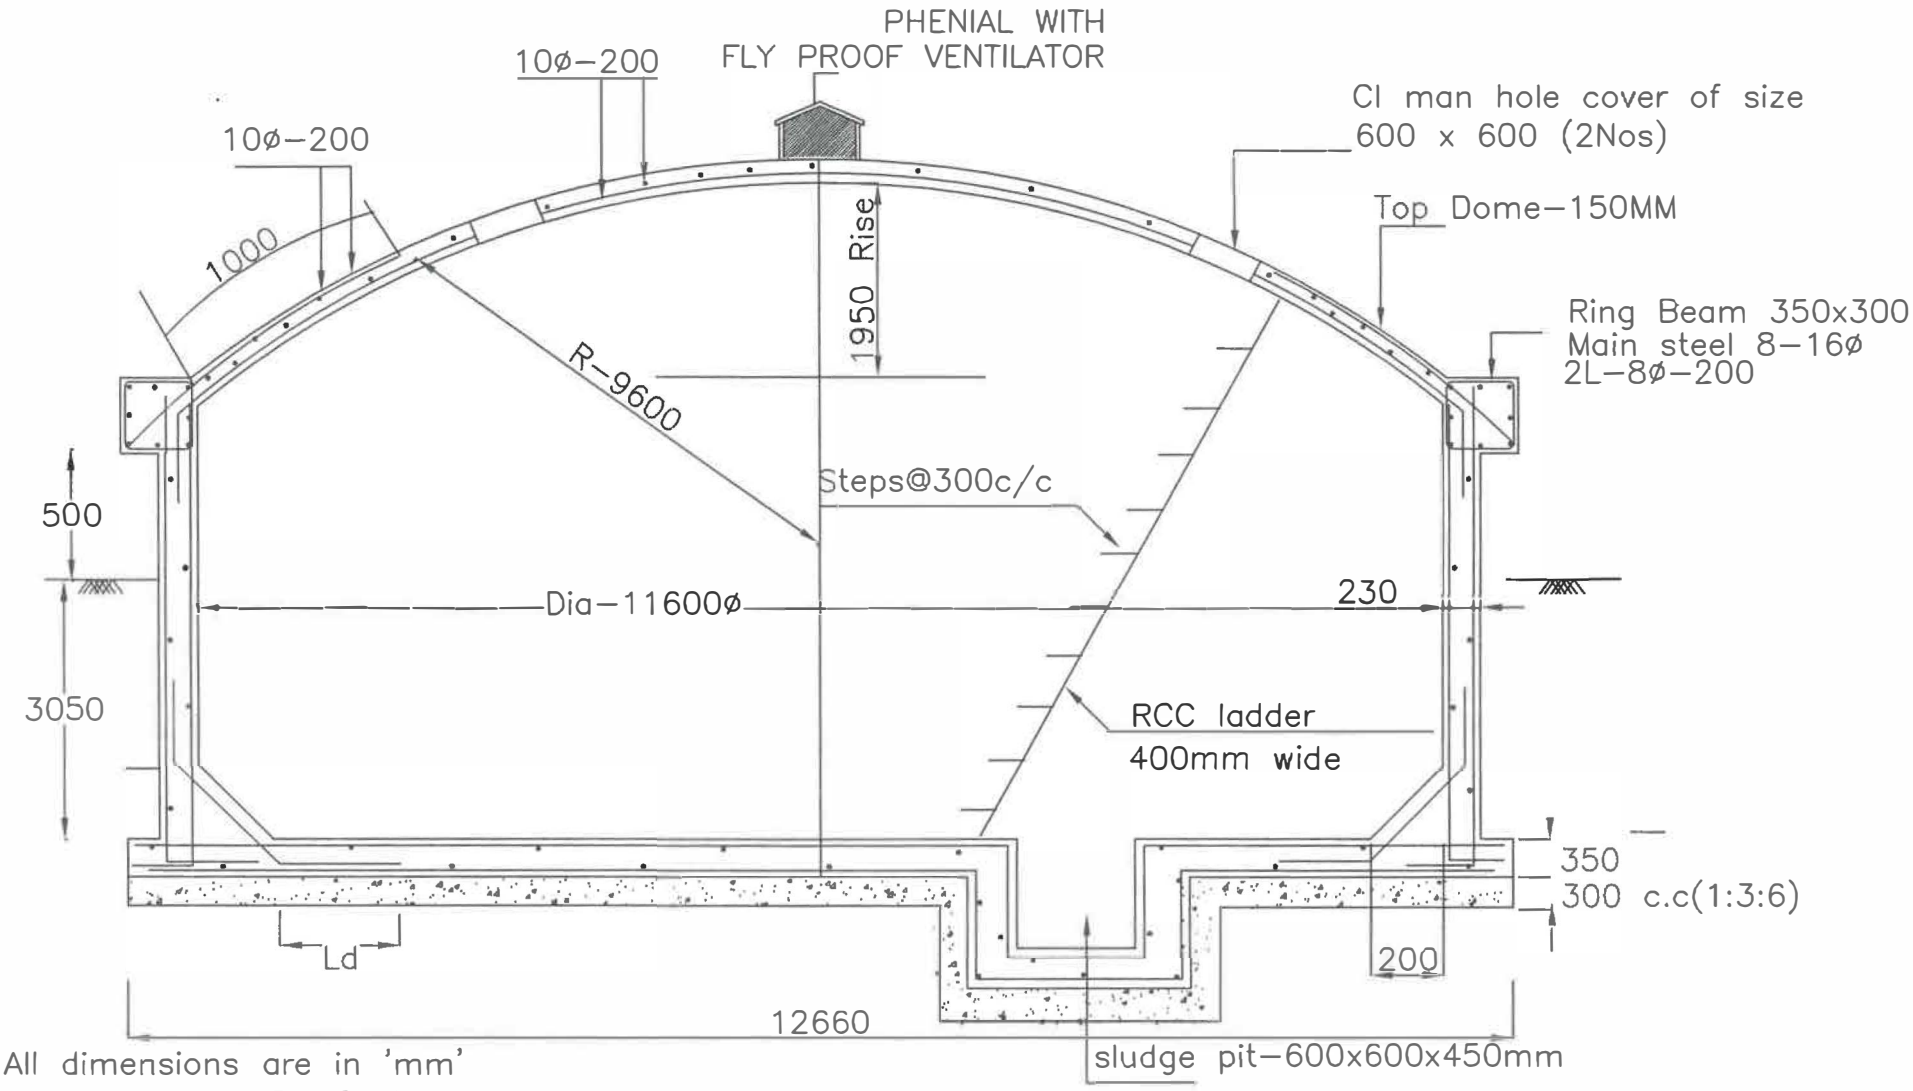

All dimensions are in 'mm'
Concrete mix V.R.C.C M30
Steel Fe–415
Reinforcement Details shall be as per IS – SP34

Asst Executive Engineer | Dy.Executive Engineer | Executive Engineer

//Approved//
Chief Engineer–II
RWS&S,Gollapudi
Vijayawada.

SCHEME:

DWG.NO.1

325 KL SUMP

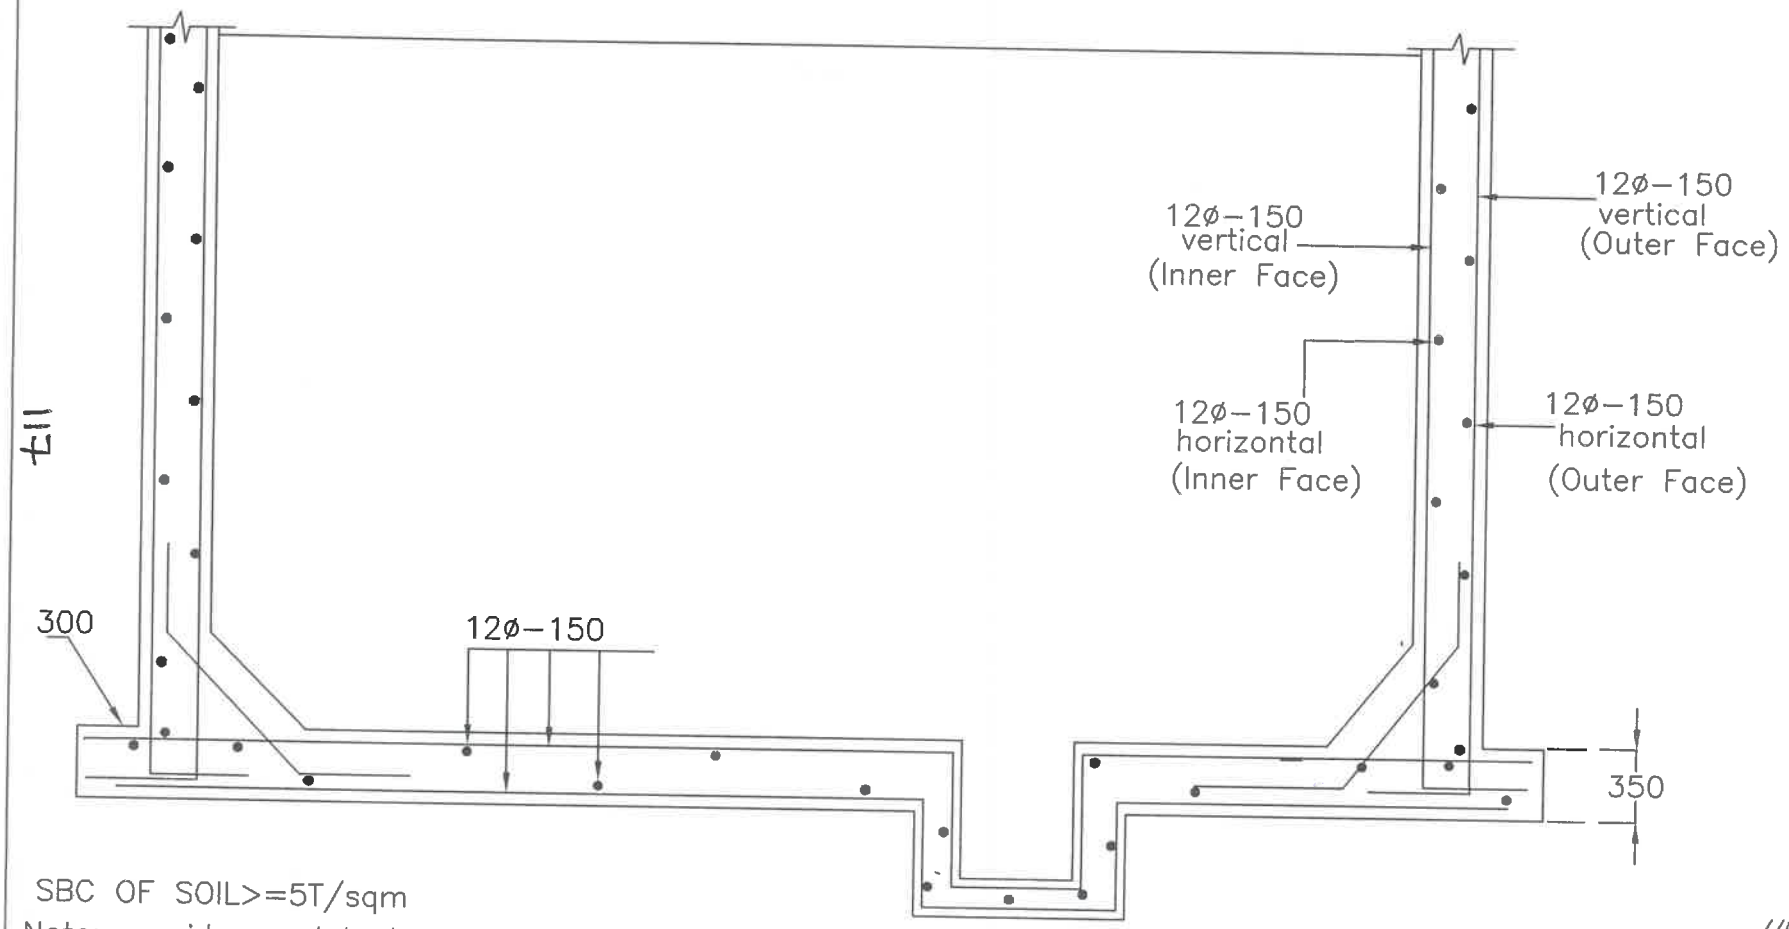

SBC OF SOIL>=5T/sqm

Note: provide sand bed as per site conditions and verify the uplift condition before grounding the work, if depth of water table<1.75m below GL

H. L. Sailaja
Asst Executive Engineer

Dy.Executive Engineer

Executive Engineer

//Approved//
Chief Engineer-II
RWS&S,Gollapudi
Vijayawada.

SCHEME:
DWG.NO.2

325 KL SUMP

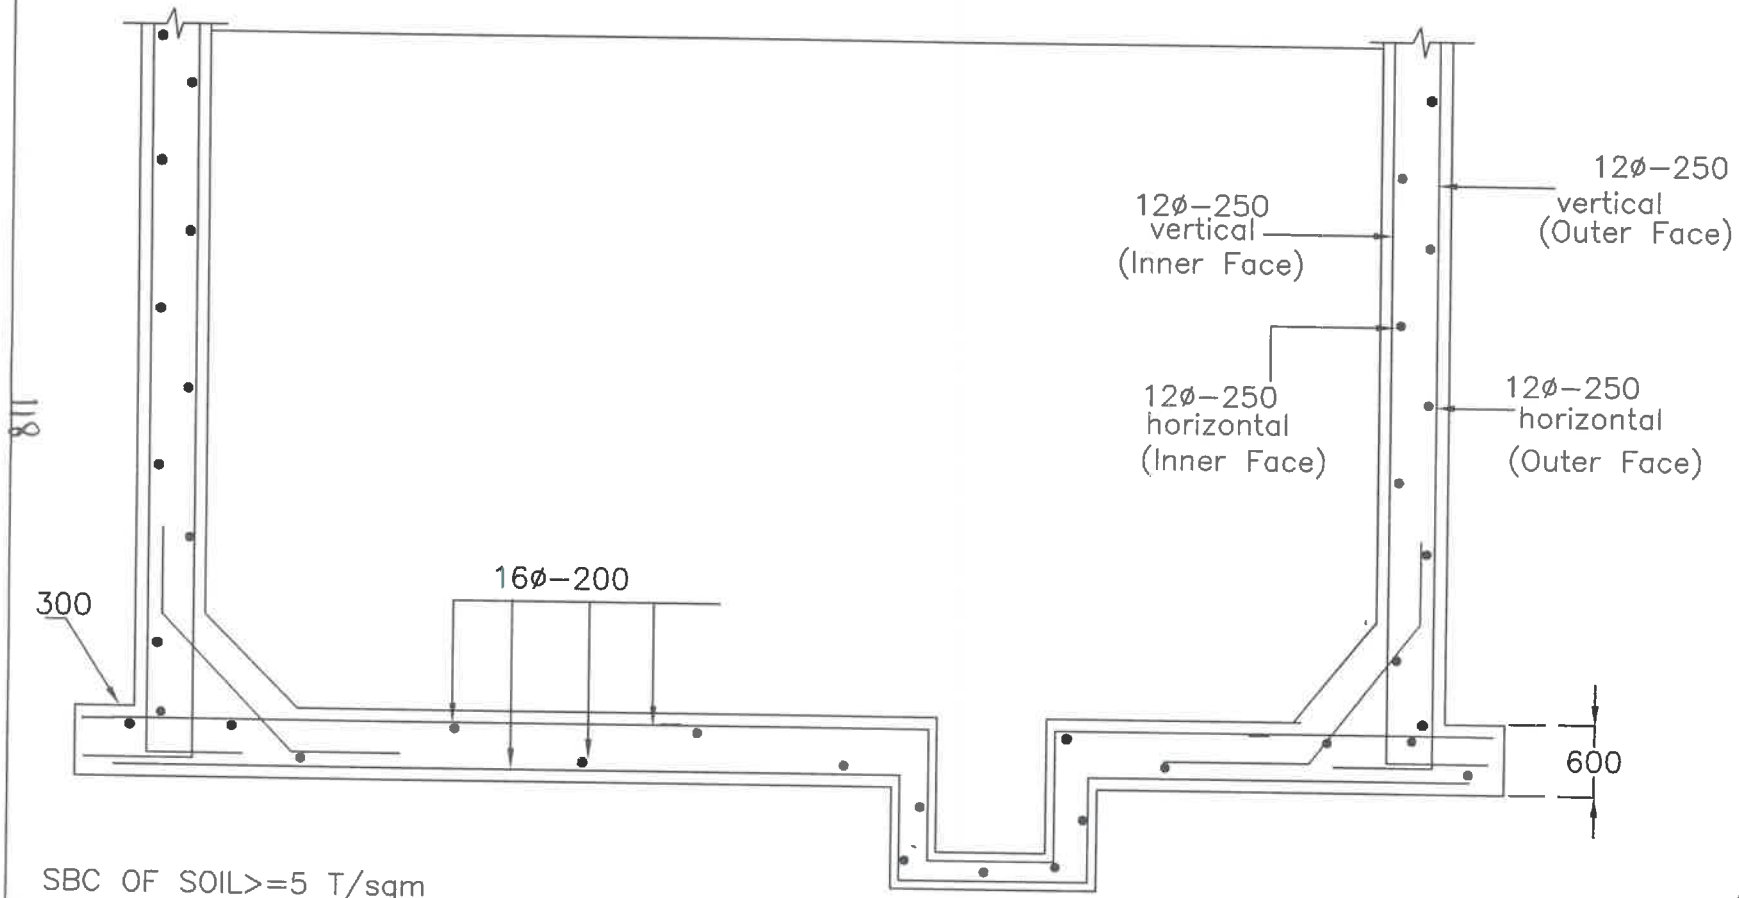

SBC OF SOIL>=5 T/sqm
Note: provide sand bed as per site conditions and verify the uplift condition before grounding the work, if depth of water table<1.0m below GL

Asst Executive Engineer | Dy.Executive Engineer | Executive Engineer

//Approved//
Chief Engineer–II
RWS&S,Gollapudi
Vijayawada.

SCHEME:
DWG.NO.2

325 KL SUMP

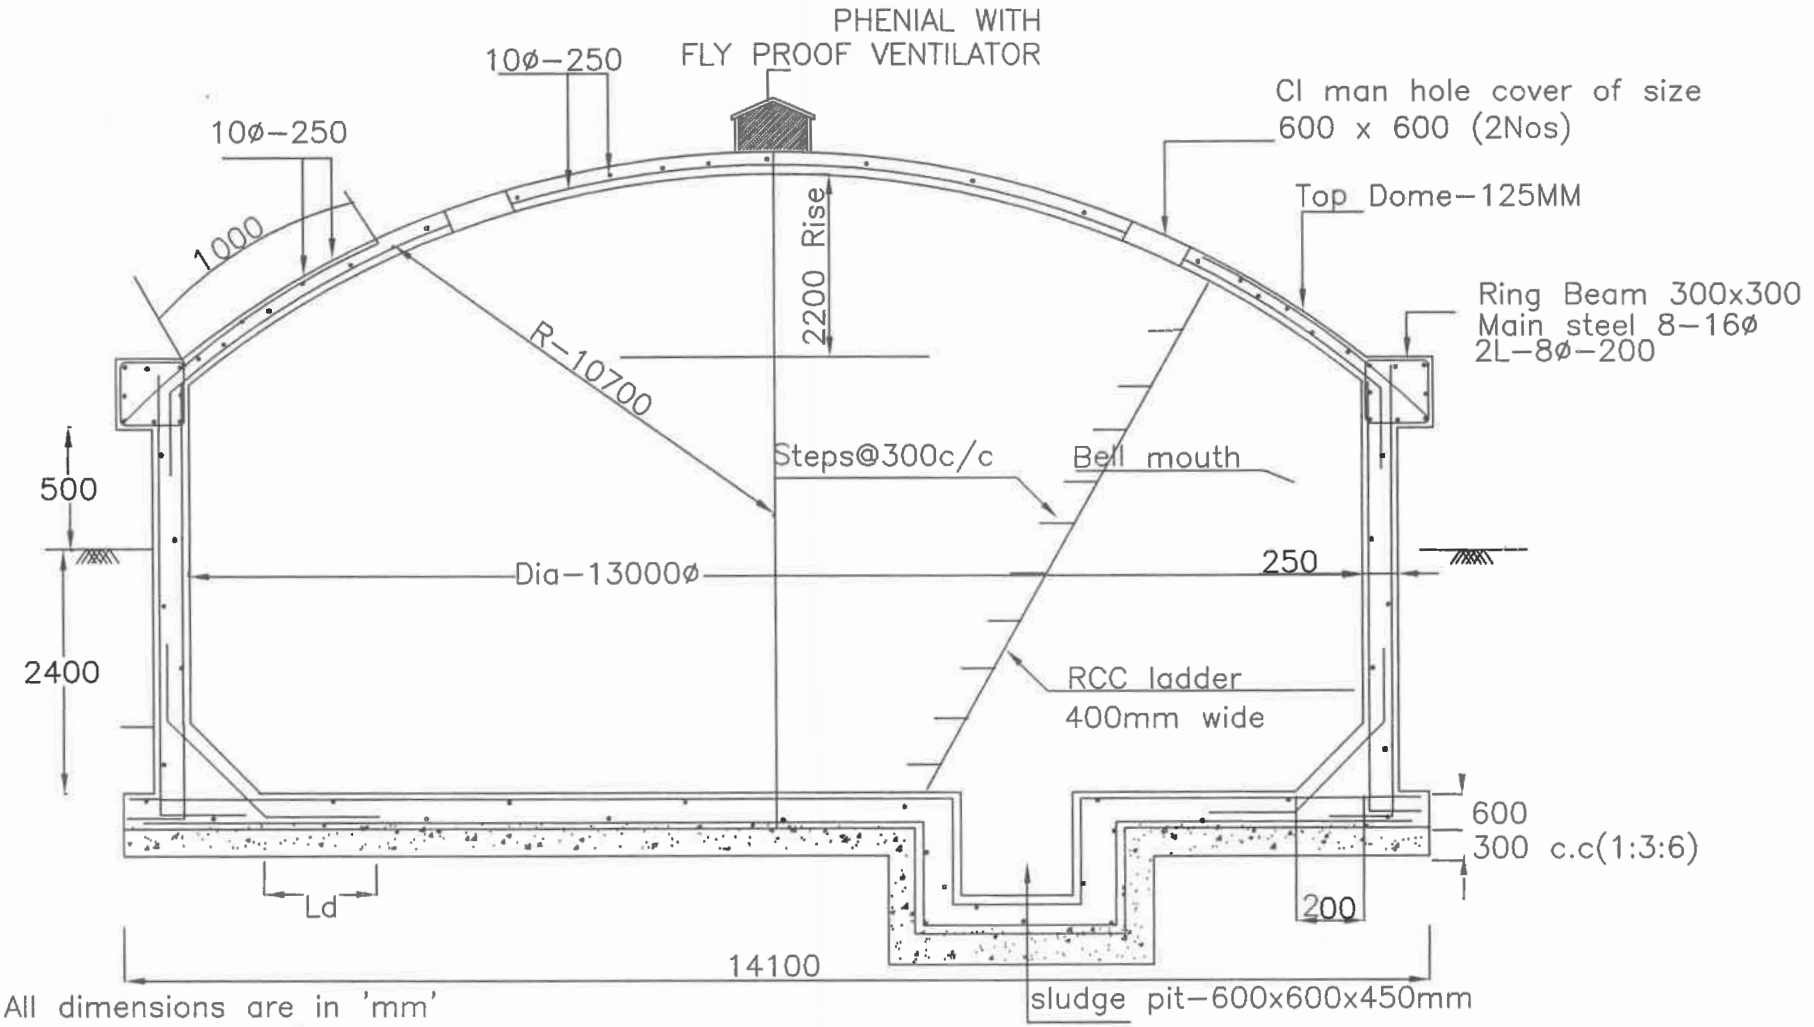

All dimensions are in 'mm'
Concrete mix V.R.C.C M30
Steel Fe–415
Reinforcement Details shall be as per IS – SP34

Asst Executive Engineer — Dy.Executive Engineer — Executive Engineer

//Approved// Sump is designed for uplift

Chief Engineer–II
RWS&S,Gollapudi
Vijayawada.

SCHEME:

DWG.NO.1