
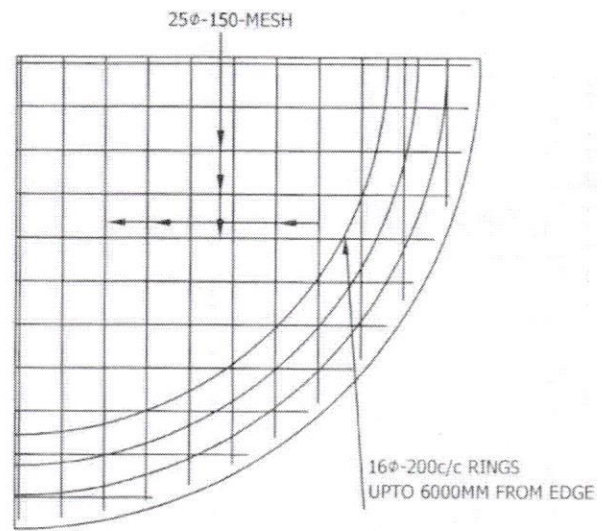
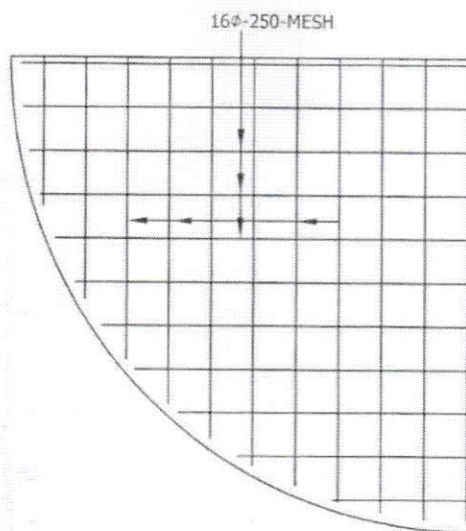


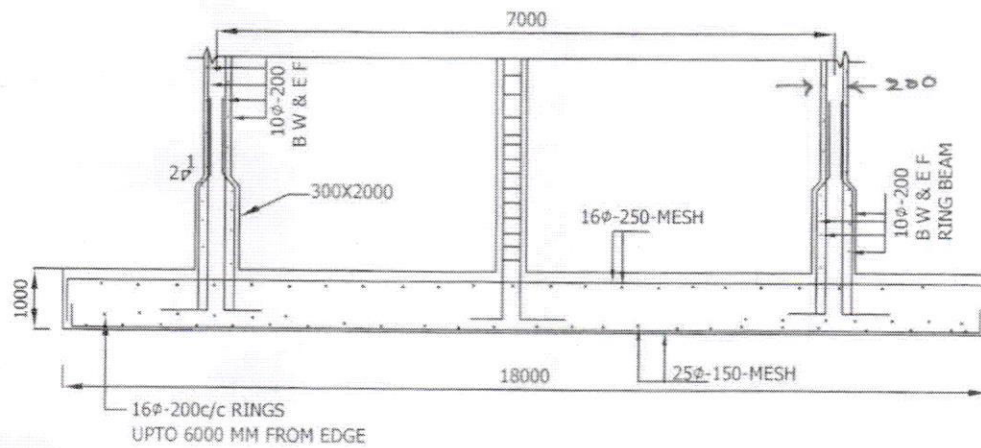

NOTE:

1. GRADE OF CONCRETE : M30
2. GRADE OF STEEL : Fe415
3. BASIC WIND SPEED : 150KMPH
4. DEPTH OF FOUNDATION: 2.50m BELOW GROUND LEVEL UPTO TOP OF RAFT
5. ALL DIMENSIONS ARE IN "MM"
6. S B C OF SOILL-5 T/SQM

P.R.
Asst Executive Engineer


T.J.
15-2-19
Dy. Executive Engineer

// Approved //
[Signature]
Chief Engineer-II
RWS&S, Gollapudi
Vijayawada.


SCHEME:

120 K.L OHBR 30.00M STG.


DRGNO:3

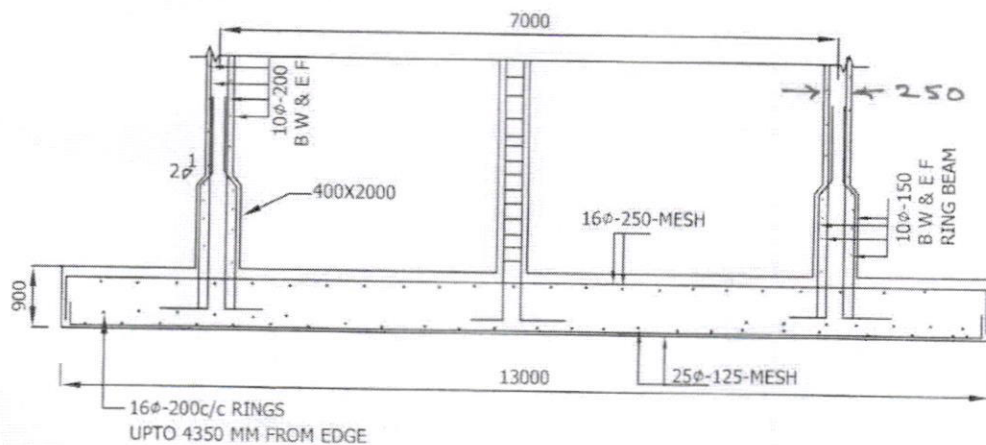

SECTIONAL ELEVATION

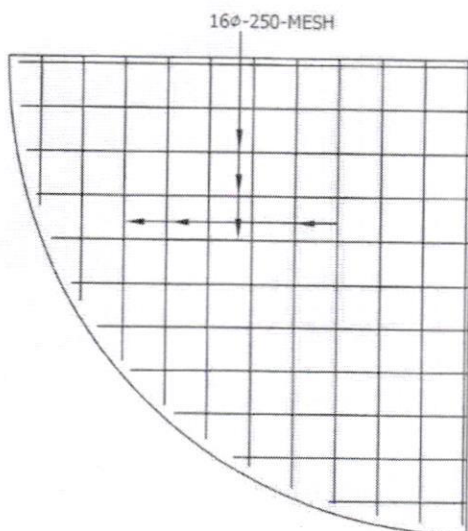

TOP REINFORCEMENT

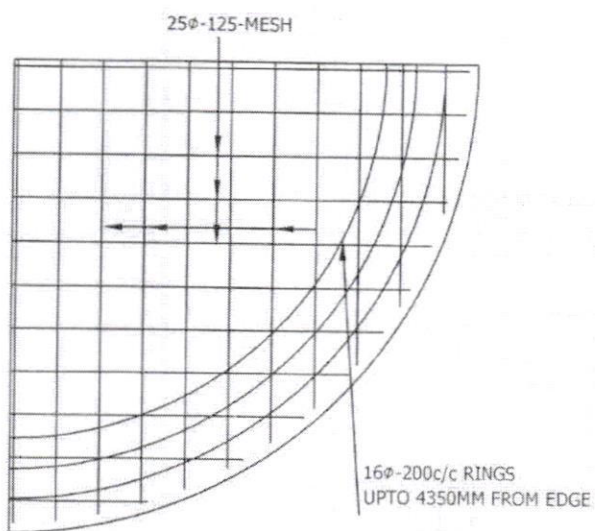

BOTTOM REINFORCEMENT

NOTE:

- 1.GRADE OF CONCRETE : M30
- 2.GRADE OF STEEL : Fe415
3. BASIC WIND SPEED : 200KMPH
- 4.DEPTH OF FOUNDATION:2.50m BELOW GROUND LEVEL UPTO TOP OF RAFT
- 5.ALL DIMENSIONS ARE IN "MM"
6. S B C OF SOILL-10 T/SQM

Asst Executive Engineer


Dy.Executive Engineer


Chief Engineer-II
RWS&S, Gollapudi
Vijayawada.

SCHEME:


120 K.L OHBR 30.00M STG.

DRGNO:3

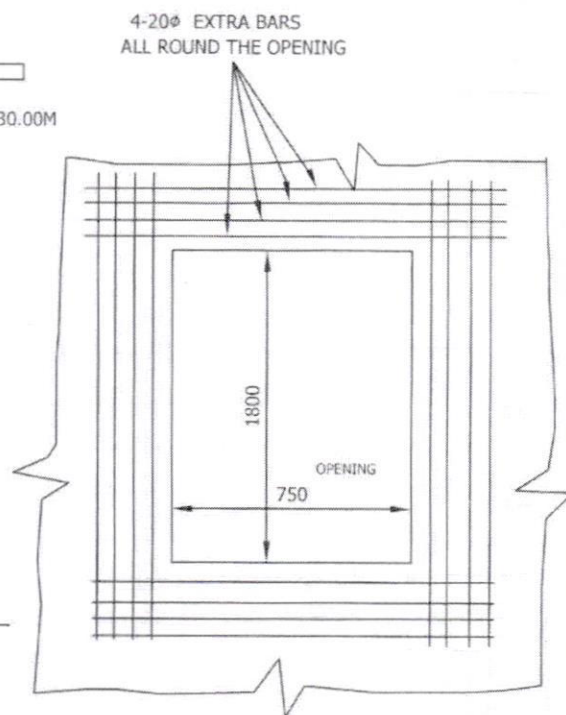


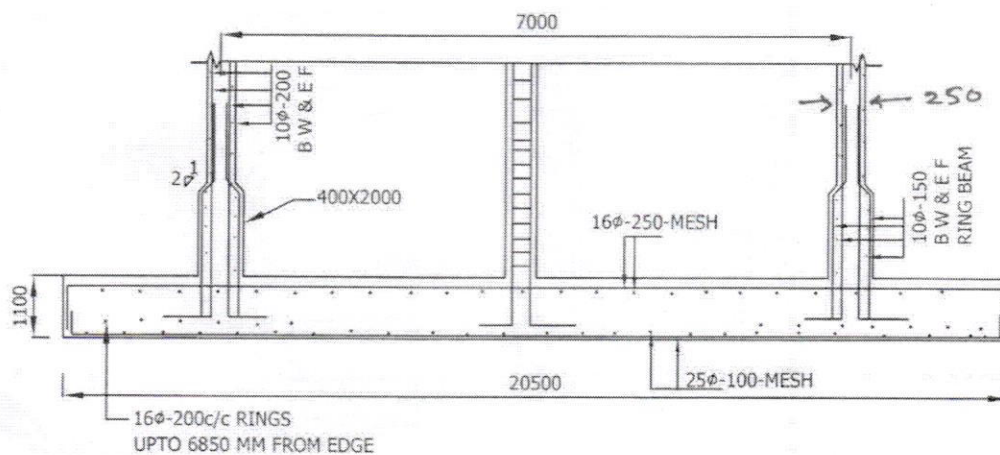

SECTIONAL ELEVATION

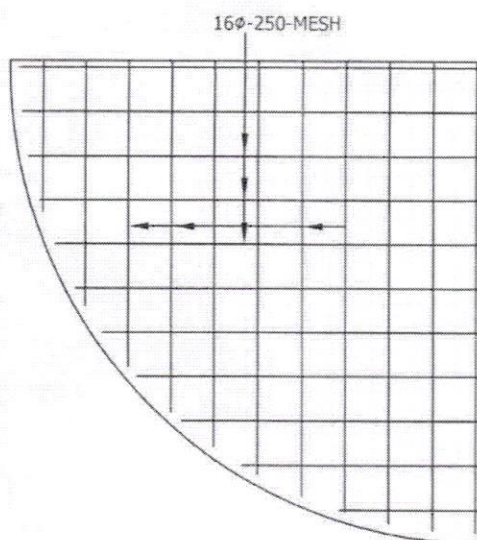

TOP REINFORCEMENT

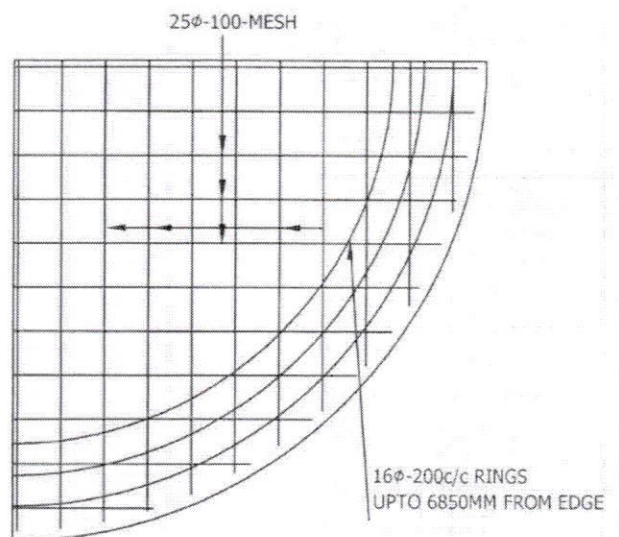

BOTTOM REINFORCEMENT

NOTE:

- 1.GRADE OF CONCRETE : M30
- 2.GRADE OF STEEL : Fe415
3. BASIC WIND SPEED : 200KMPH
- 4.DEPTH OF FOUNDATION:2.50m BELOW GROUND LEVEL UPTO TOP OF RAFT
- 5.ALL DIMENSIONS ARE IN "MM"
6. S B C OF SOILL-5 T/SQM

Asst Executive Engineer


Dy.Executive Engineer

//Approved//
Chief Engineer-II
RWS&S, Gollapudi
Vijayawada.


SCHEME:

120 K.L OHBR 30.00M STG.


DRGNO:3

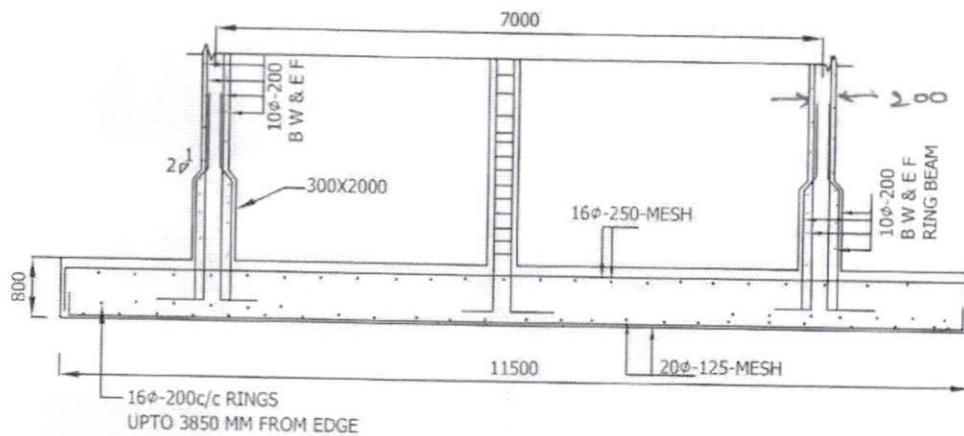

SECTIONAL ELEVATION

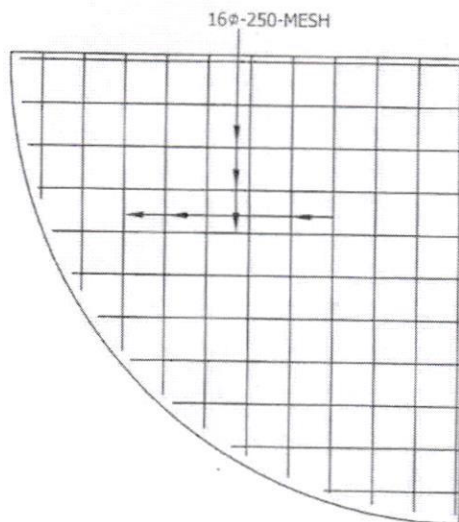

TOP REINFORCEMENT

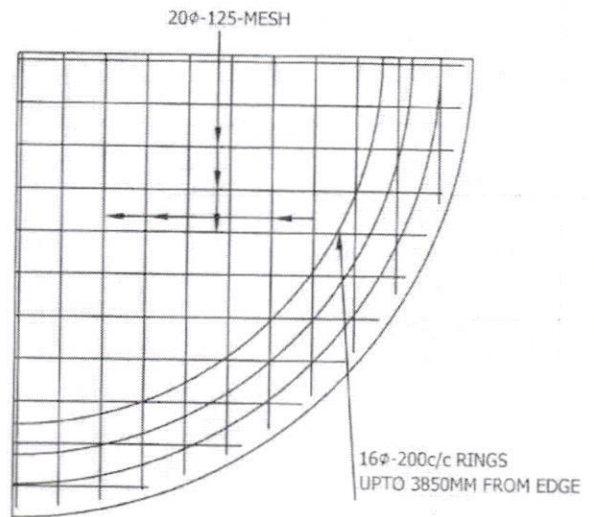

BOTTOM REINFORCEMENT

NOTE:

- 1.GRADE OF CONCRETE : M30
- 2.GRADE OF STEEL : Fe415
3. BASIC WIND SPEED : 150KMPH
- 4.DEPTH OF FOUNDATION:2.50m BELOW GROUND
LEVEL UPTO TOP OF RAFT
- 5.ALL DIMENSIONS ARE IN "MM"
6. S B C OF SOILL-10T/SQM

POK
Asst Executive Engineer

907
15.2.2017
Dy. Executive Engineer

[Signature]
Chief Engineer-II
RWS&S, Gollapudi
Vijayawada.

SCHEME:

120 K.L OHBR 30.00M STG.

DRGNO:3

