
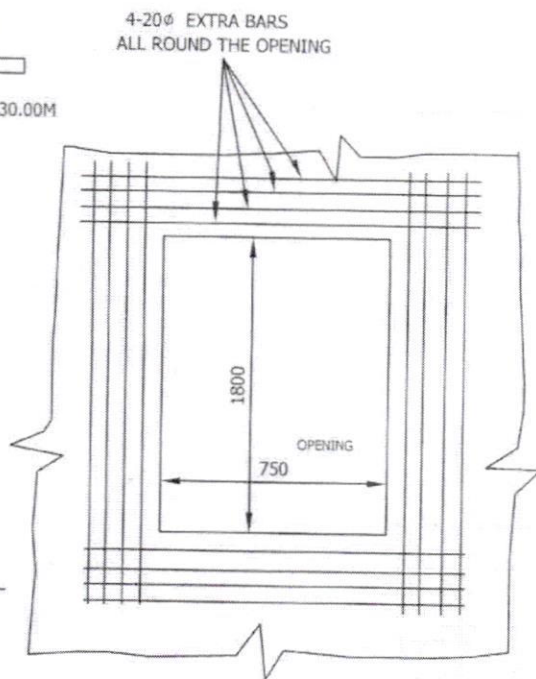


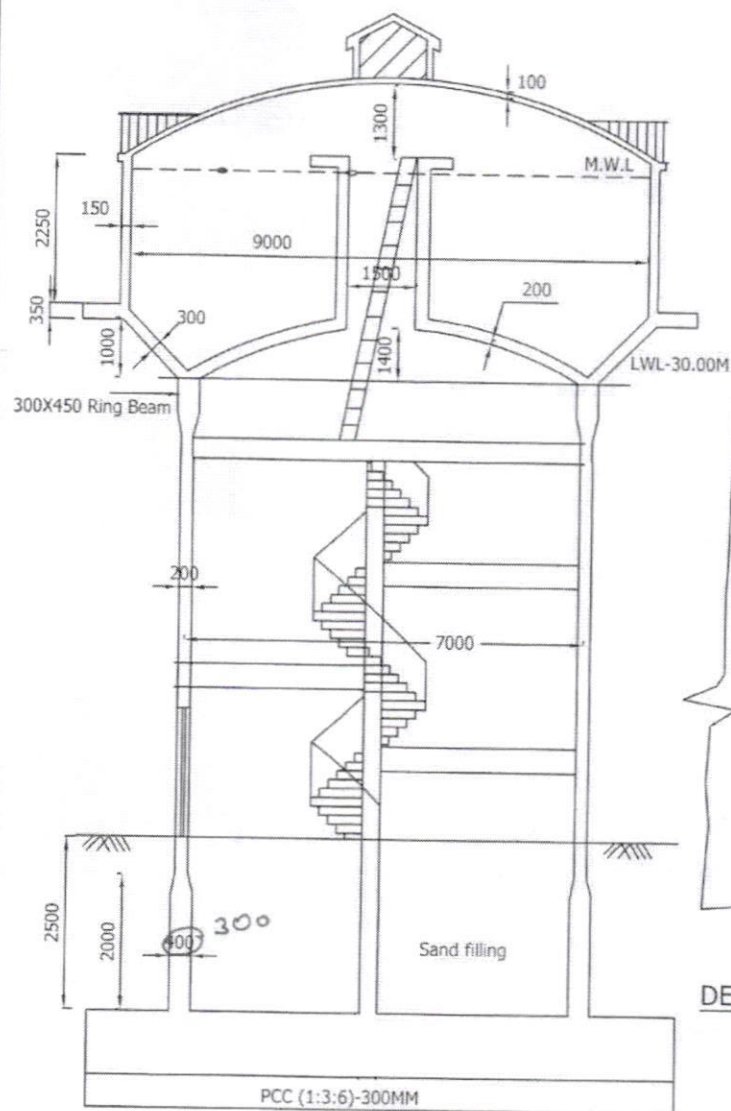

DETAILS AT THE OPENING OF SHAFT

Asst Executive Engineer

Dy. Executive Engineer


Chief Engineer-II
RWS&S, Golepudi
Vijayawada.

SCHEME:


150 K.L OHBR 30.00M STG.

DRGNO:1


150 KMPH

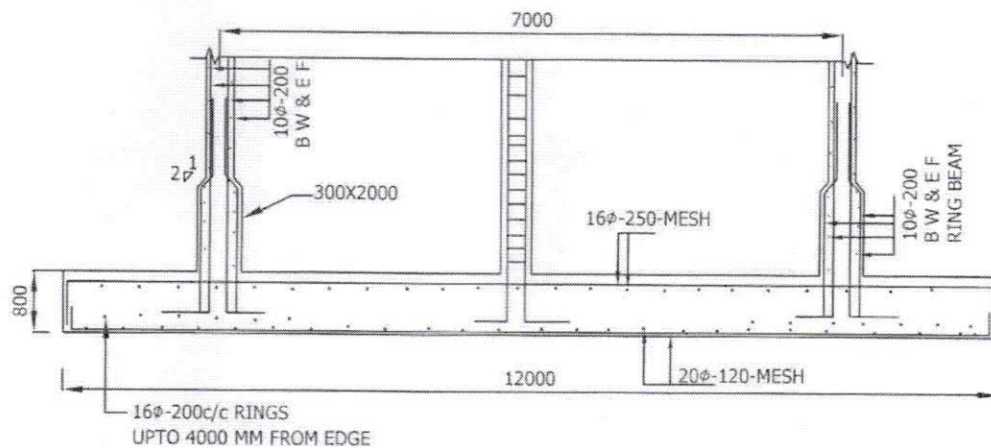

SECTIONAL ELEVATION

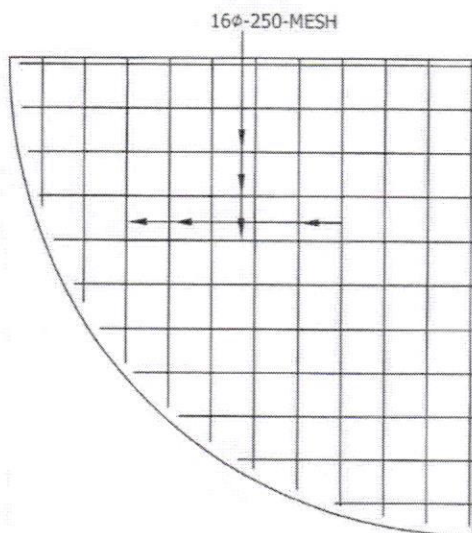

TOP REINFORCEMENT

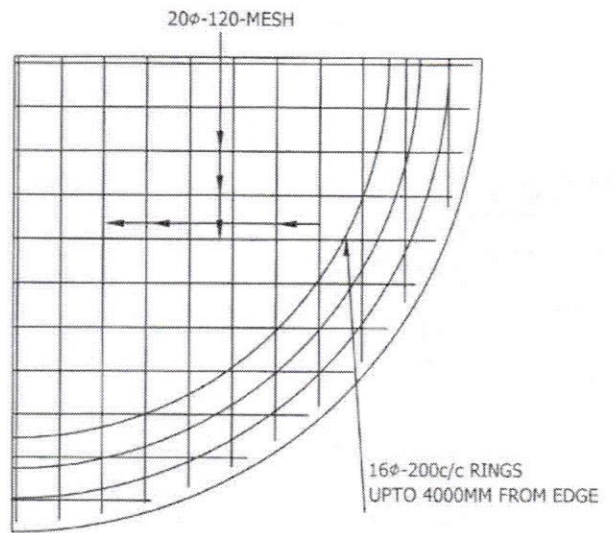

BOTTOM REINFORCEMENT

NOTE:

- 1.GRADE OF CONCRETE : M30
- 2.GRADE OF STEEL : Fe415
3. BASIC WIND SPEED : 150KMPH
- 4.DEPTH OF FOUNDATION:2.50m BELOW GROUND LEVEL UPTO TOP OF RAFT
- 5.ALL DIMENSIONS ARE IN "MM"
6. S B C OF SOILL-10 T/SQM

Asst Executive Engineer

Dy.Executive Engineer

//Approved//

Chief Engineer-II
RWS&S, Gollapudi
Vijayawada.

SCHEME:


150 K.L OHBR 30.00M STG.

DRGNO:3


2

38


216

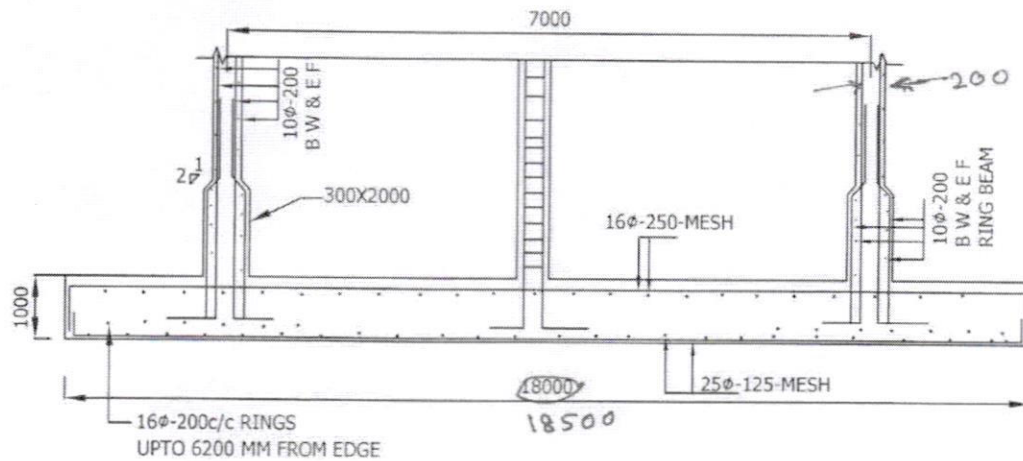

SECTIONAL ELEVATION

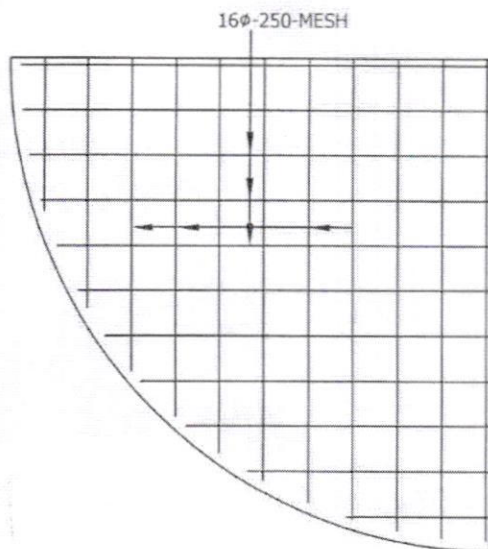

TOP REINFORCEMENT

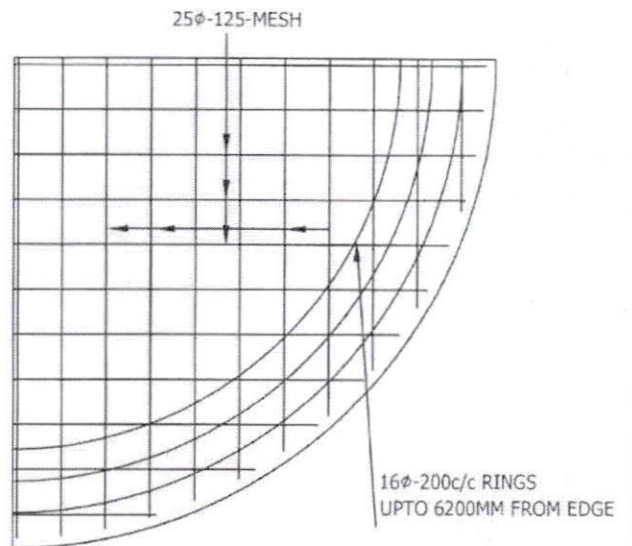

BOTTOM REINFORCEMENT

NOTE:

- 1.GRADE OF CONCRETE : M30
- 2.GRADE OF STEEL : Fe415
3. BASIC WIND SPEED : 150KMPH
- 4.DEPTH OF FOUNDATION:2.50m BELOW GROUND LEVEL UPTO TOP OF RAFT
- 5.ALL DIMENSIONS ARE IN "MM"
6. S B C OF SOILL-5 T/SQM

Asst Executive Engineer



Dy.Executive Engineer

Approved//
Chief Engineer-II
RWS&S, Gollapudi
Vijayawada.

SCHEME:

150 K.L OHBR 30.00M STG.

DRGNO:3

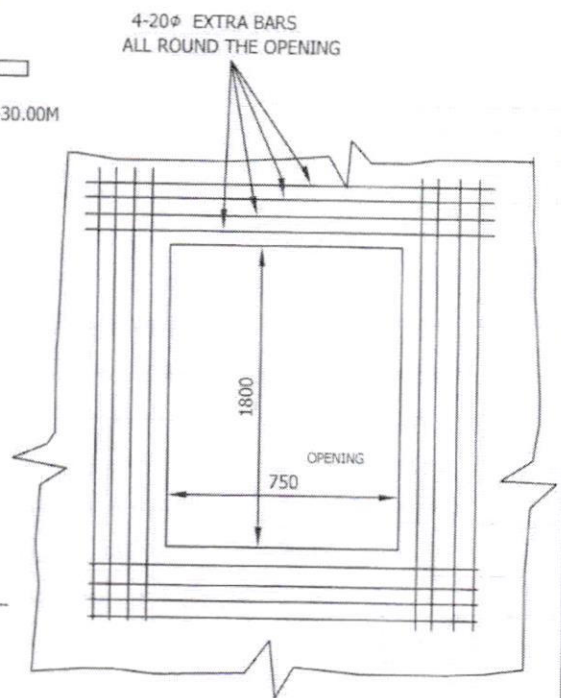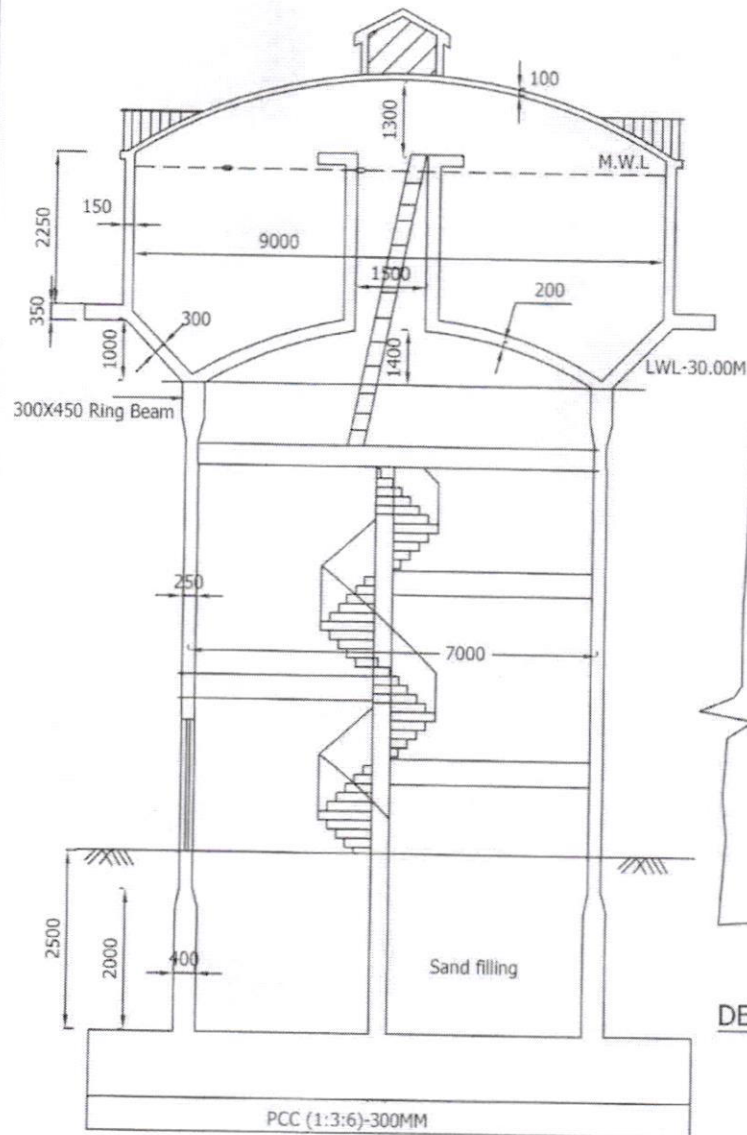

DETAILS AT THE OPENING OF SHAFT

200 KMPH

Asst Executive Engineer


Dy. Executive Engineer

Chief Engineer-II
RWS&S, Gollapudi
Vijayawada.


SCHEME:

120 K.L OHBR 30.00M STG.


DRGNO:1

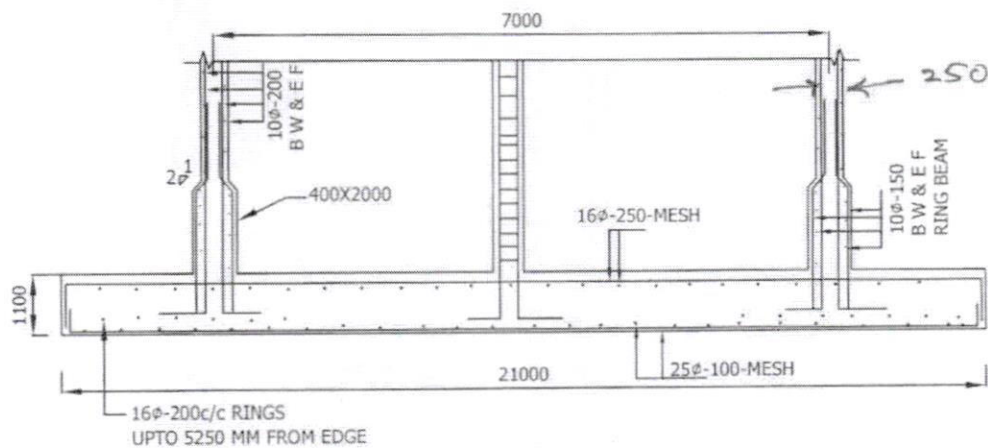

SECTIONAL ELEVATION

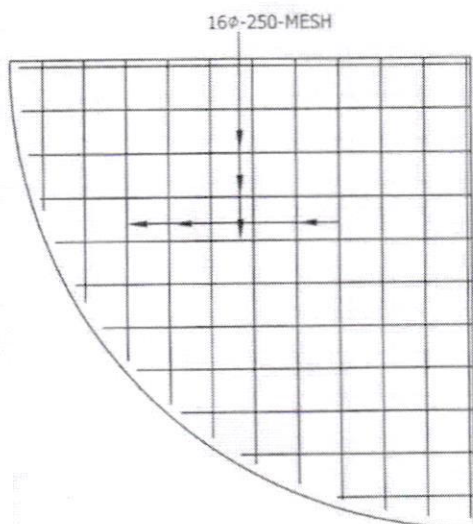

TOP REINFORCEMENT

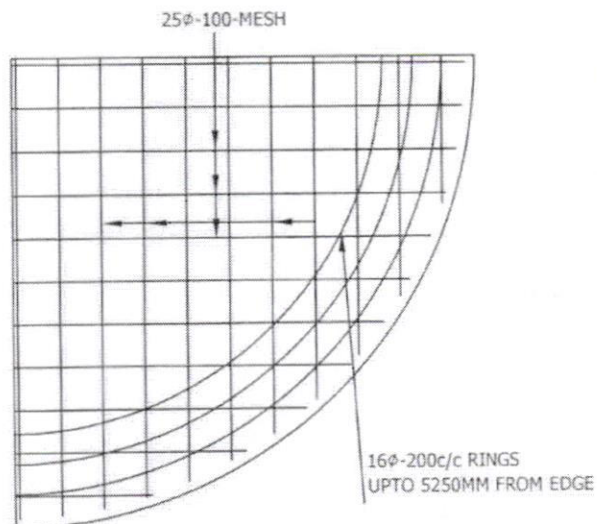

BOTTOM REINFORCEMENT

NOTE:

1. GRADE OF CONCRETE : M30
2. GRADE OF STEEL : Fe415
3. BASIC WIND SPEED : 200KMPH
4. DEPTH OF FOUNDATION: 2.50m BELOW GROUND
LEVEL UPTO TOP OF RAFT
5. ALL DIMENSIONS ARE IN "MM"
6. S B C OF SOILL-5 T/SQM

Asst Executive Engineer


Dy. Executive Engineer

Approved//
Chief Engineer-II
RWS&S, Gollapudi
Vijayawada.


SCHEME:

150 K.L OHBR 30.00M STG.


DRGNO:3

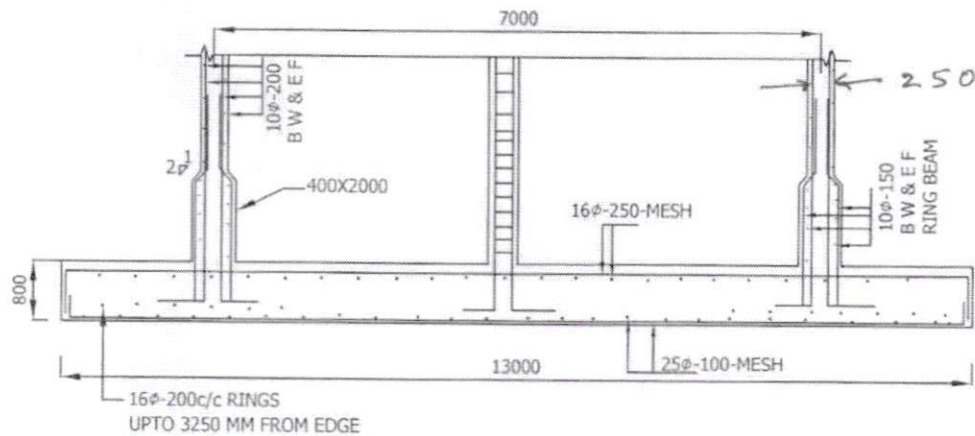

SECTIONAL ELEVATION

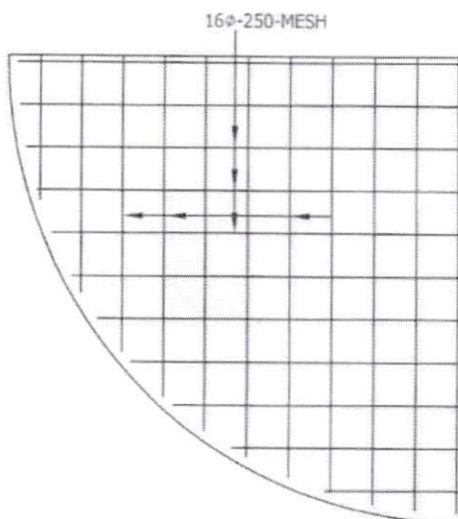

TOP REINFORCEMENT

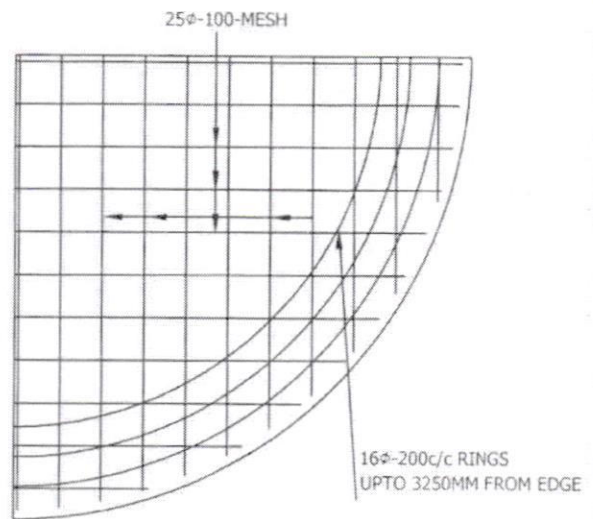

BOTTOM REINFORCEMENT

NOTE:

- 1.GRADE OF CONCRETE : M30
- 2.GRADE OF STEEL : Fe415
3. BASIC WIND SPEED : 200KMPH
- 4.DEPTH OF FOUNDATION:2.50m BELOW GROUND LEVEL UPTO TOP OF RAFT
- 5.ALL DIMENSIONS ARE IN "MM"
6. S B C OF SOILL-10 T/SQM

Asst Executive Engineer

Dy.Executive Engineer

Approved
Chief Engineer-II
RWS&S,Gollapudi
Vijayawada.

SCHEME:

150 K.L OHBR 30.00M STG.

DRGNO:3