



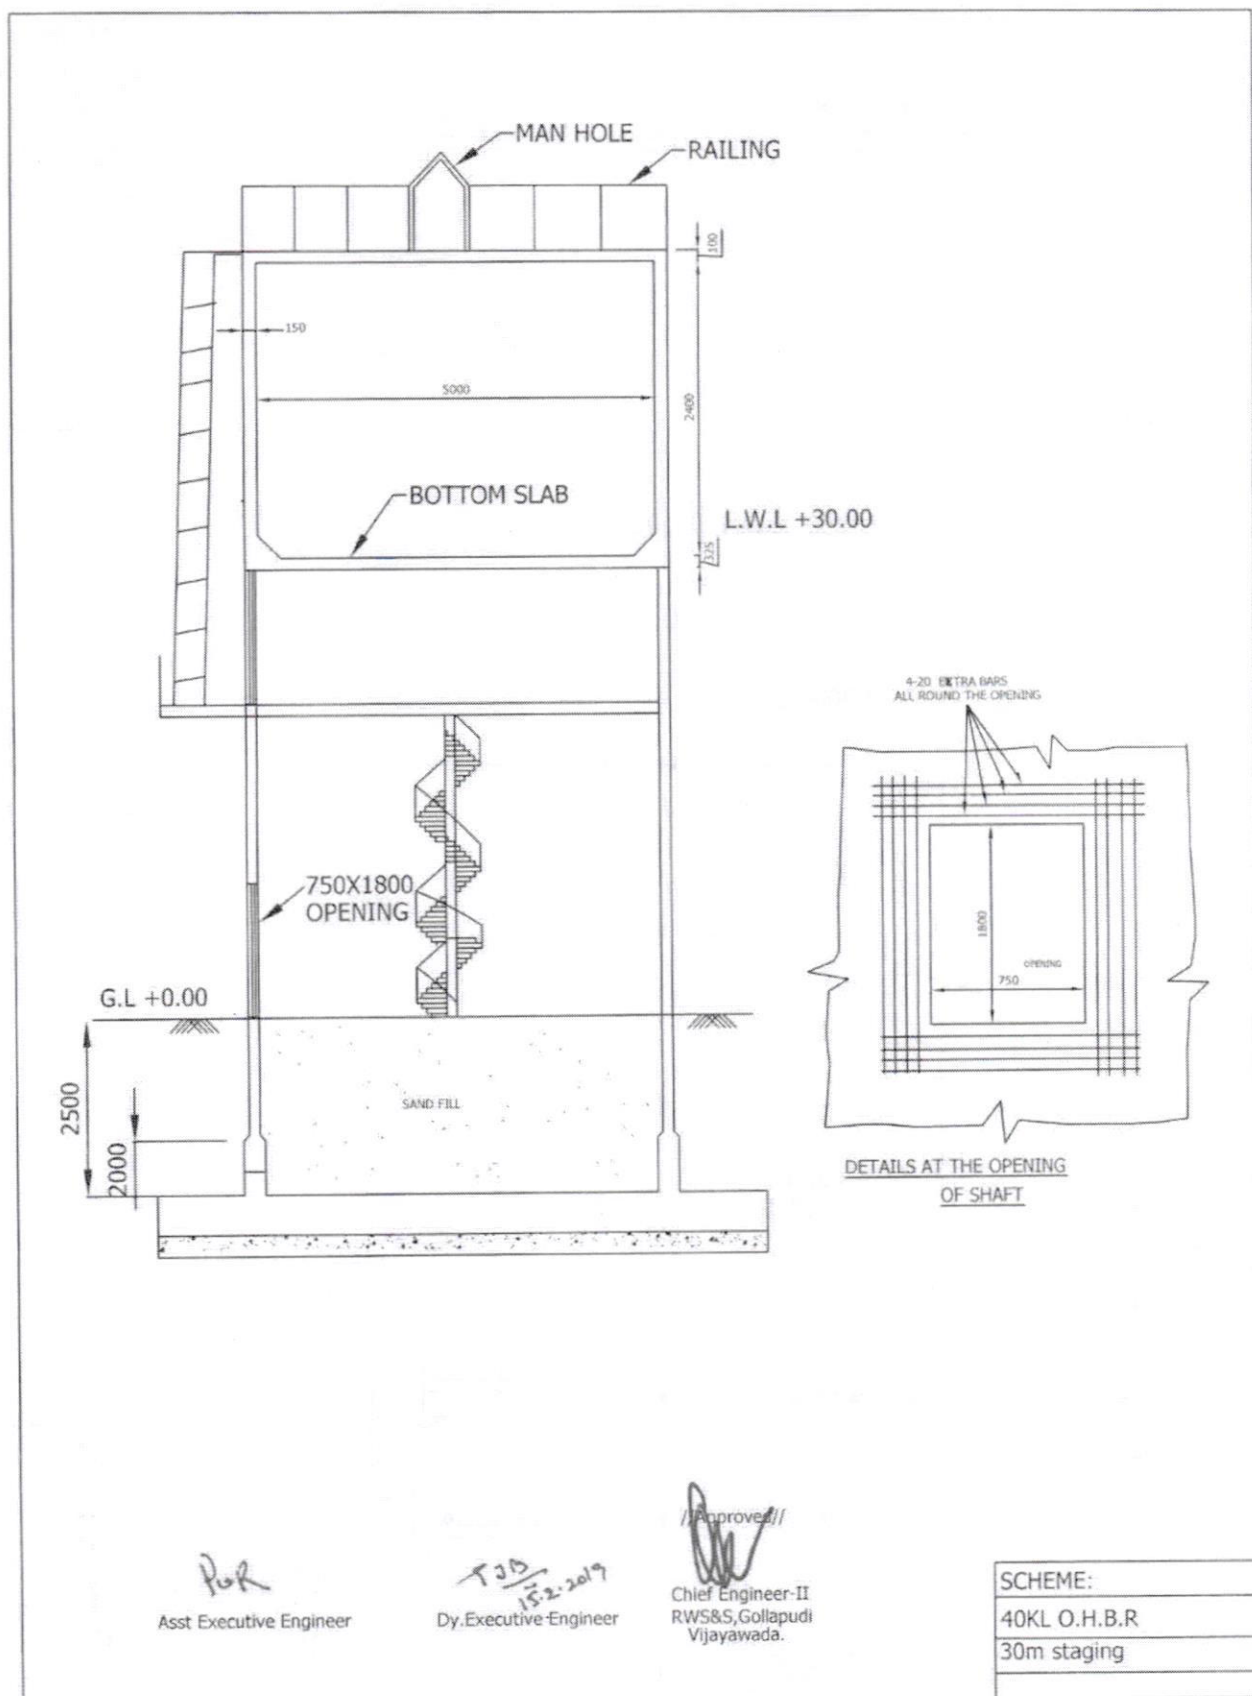

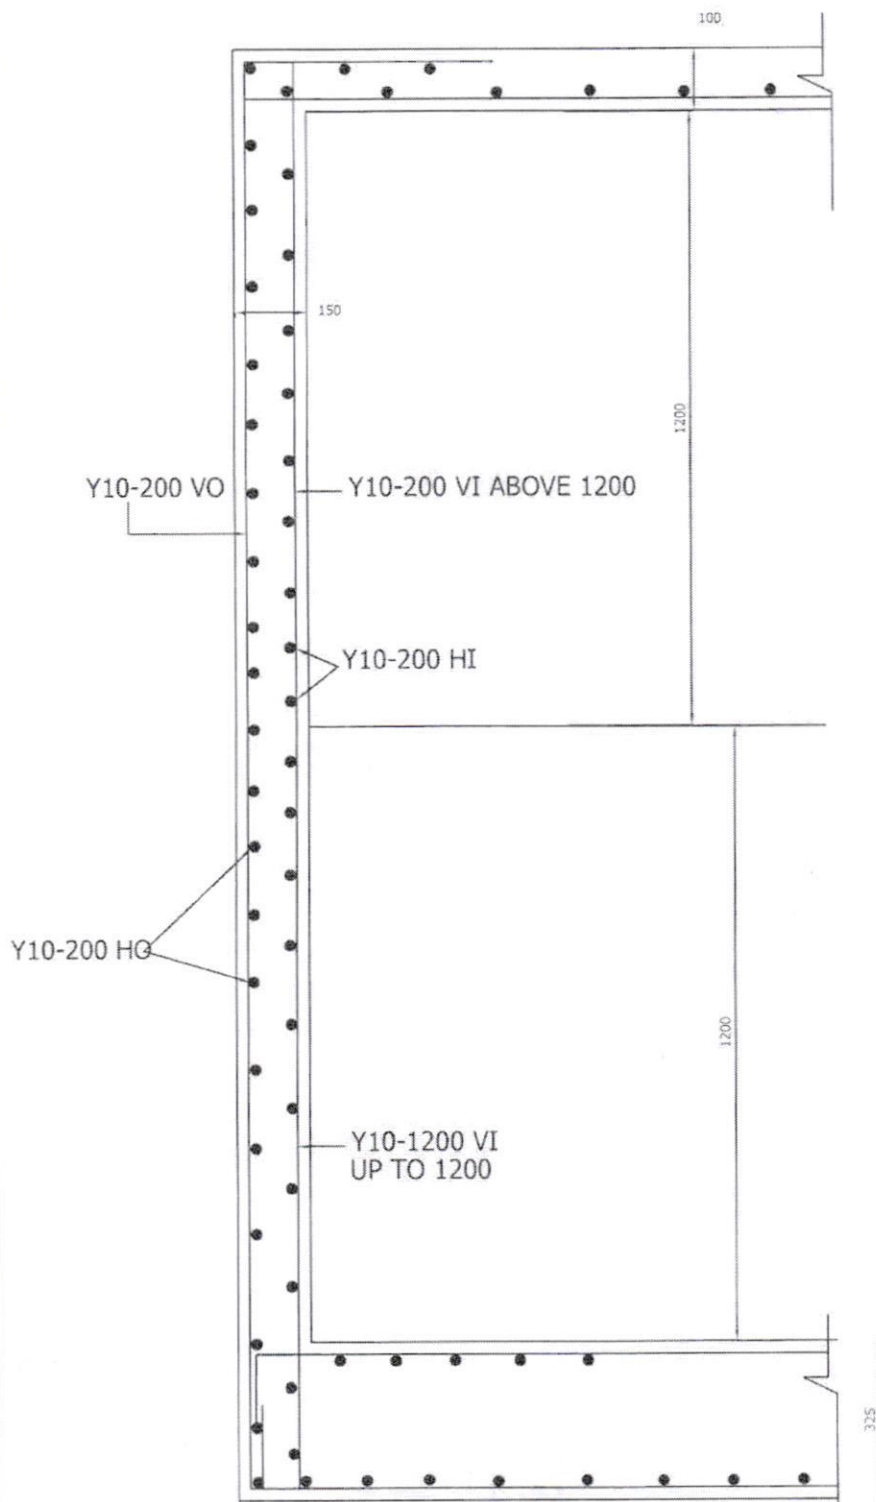





SECTION OF SIDE WALL

SCHEME:

40KL O.H.B.R

30m staging




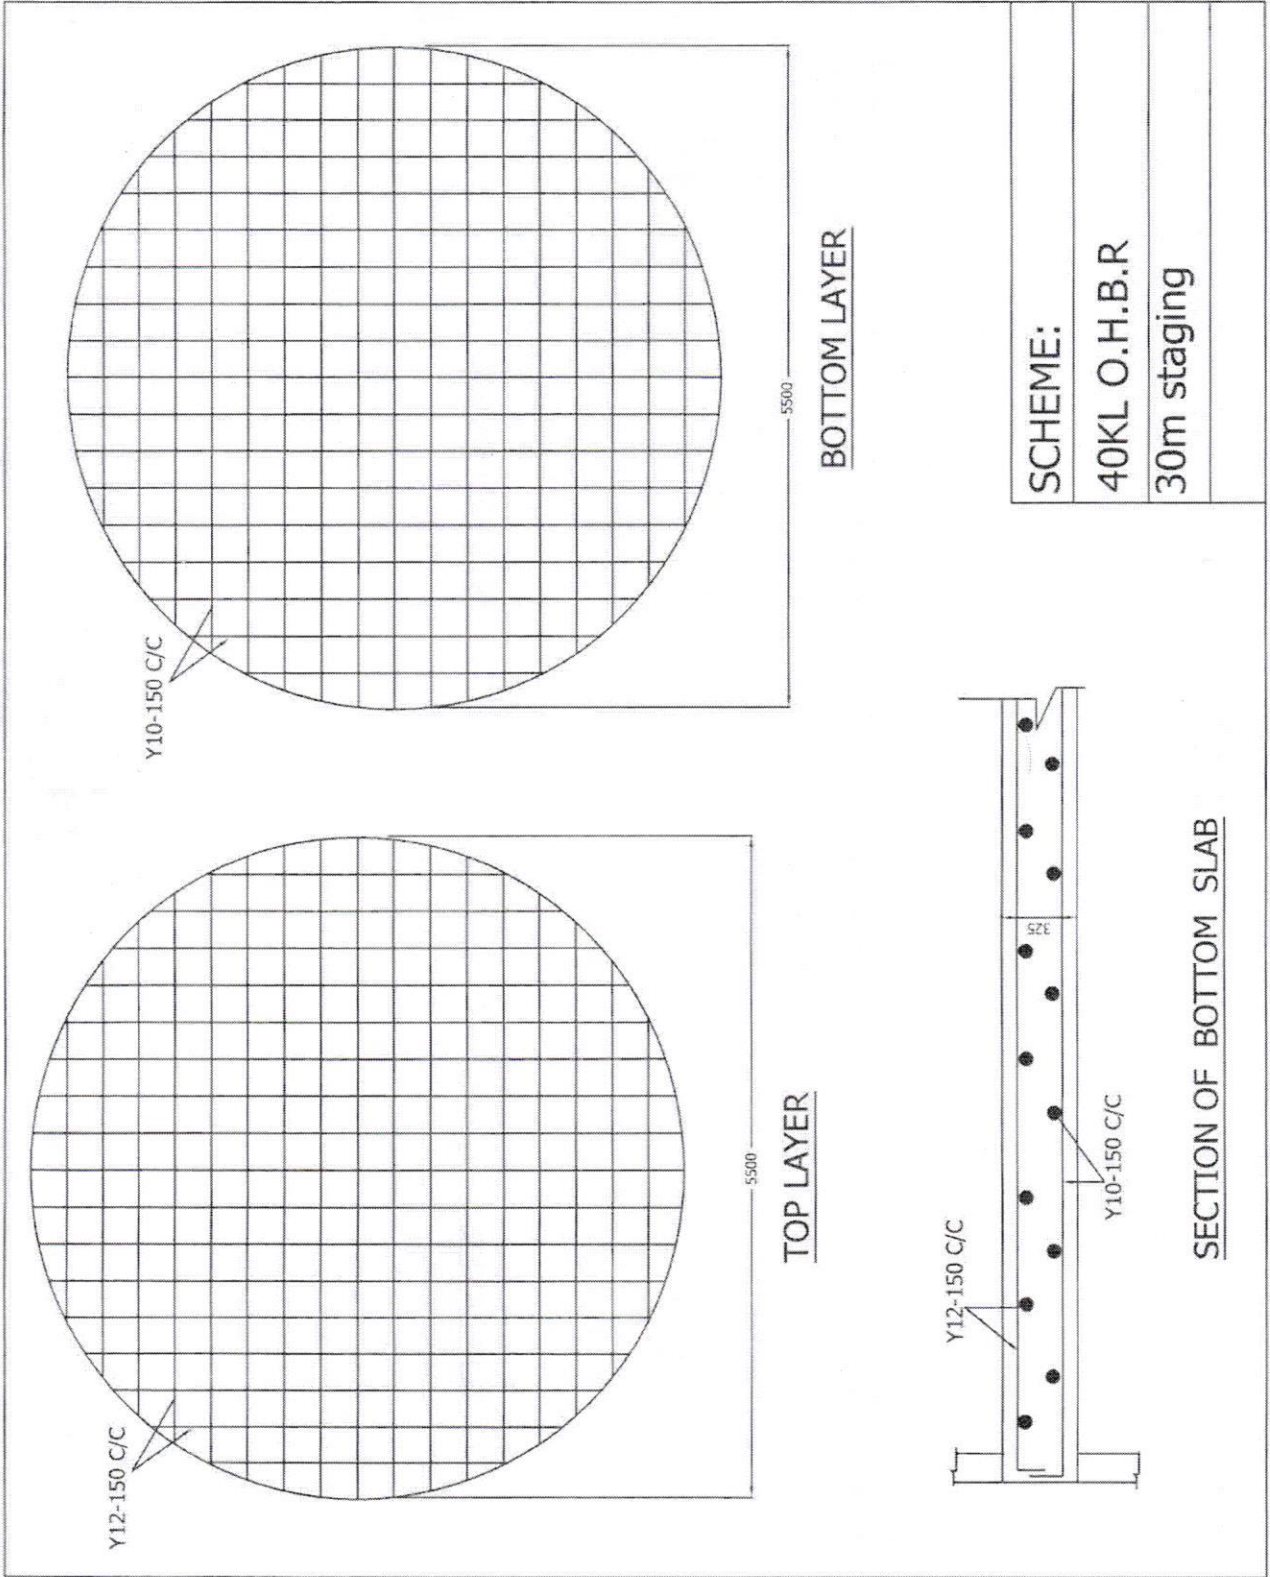


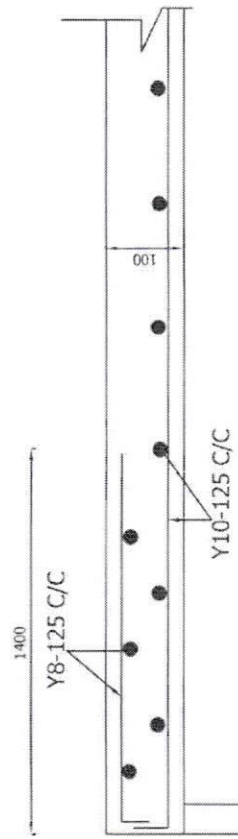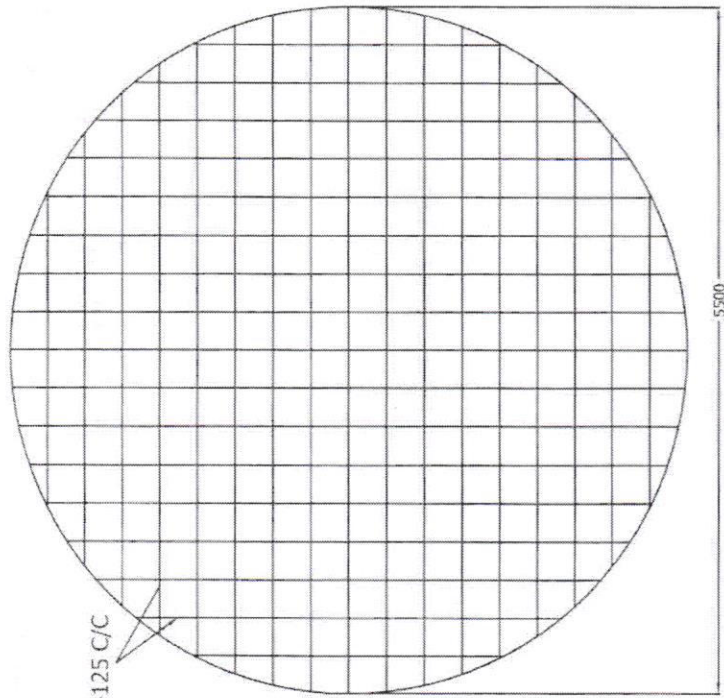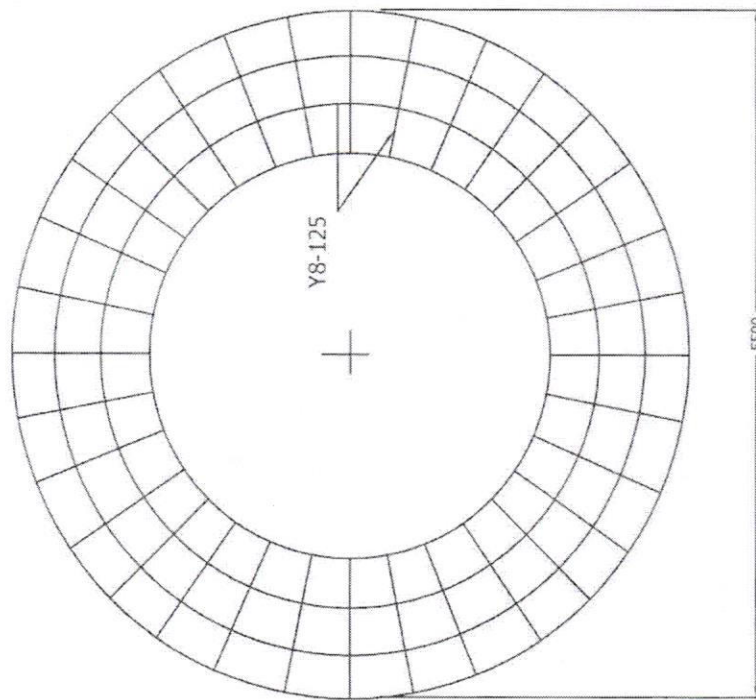

SCHEME:

40KL O.H.B.R

30m staging

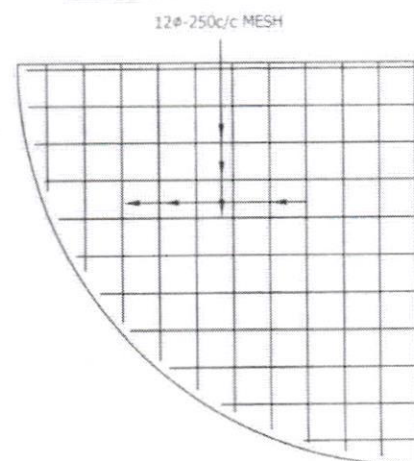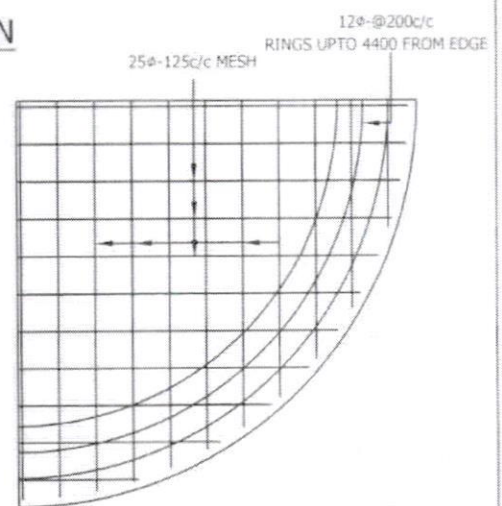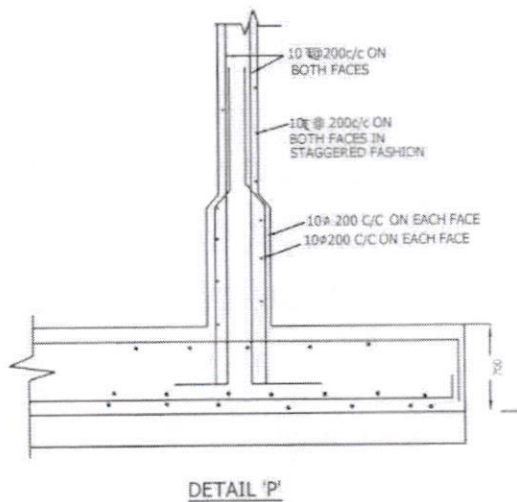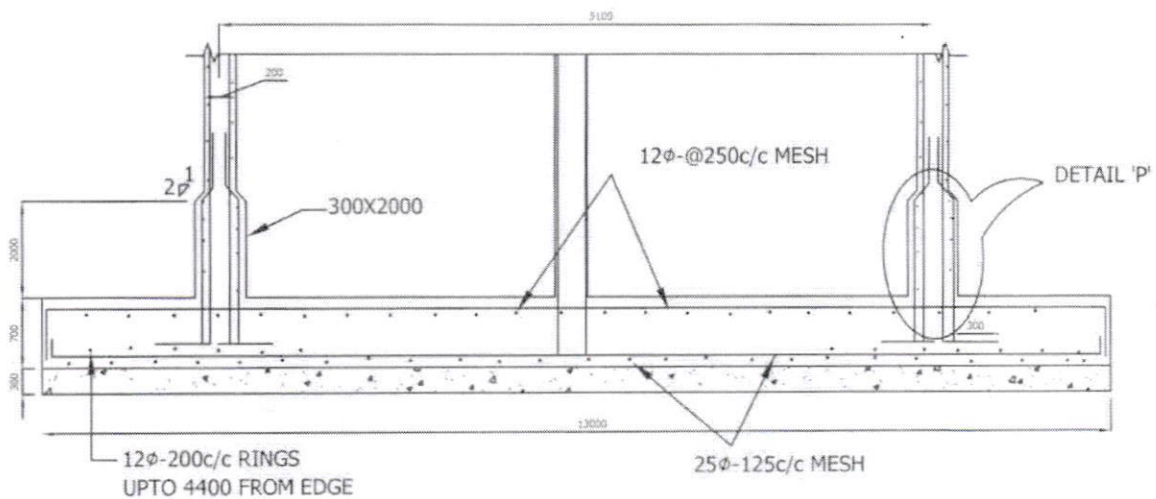

NOTE:


1. S.B.C. - 5-t/m²
2. WIND SPEED IS 150KMPH
3. GRADE OF CONCRETE M30
GRADE OF STEEL Fe415
4. DETAILING OF REINFORCEMENT SHALL
BE AS PER IS SP-34
5. PROVISIONS OF IS456, IS3370
SHALL BE FOLLOWED

[Signature]
Asst Executive Engineer


[Signature]
15.2.2019
Dy. Executive Engineer

Approved//
[Signature]
Chief Engineer-II
RWSSS, Gollapudi
Vijayawada.


SCHEME:
40KL O.H.B.R.
30m staging

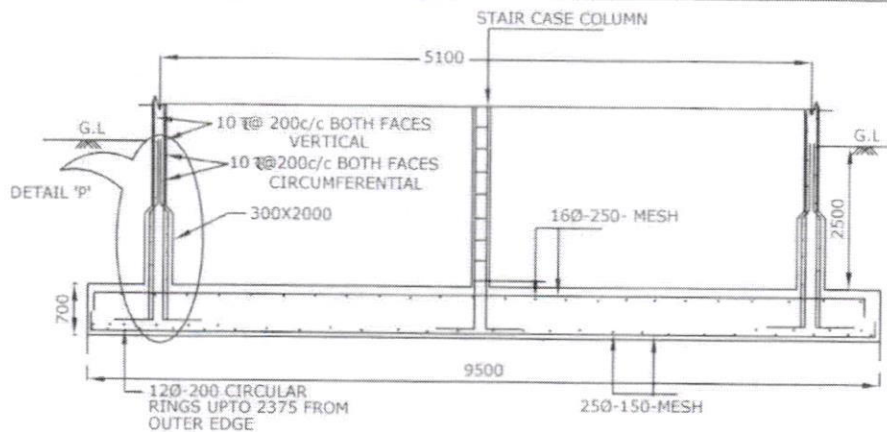


SECTIONAL ELEVATION OF RAFT

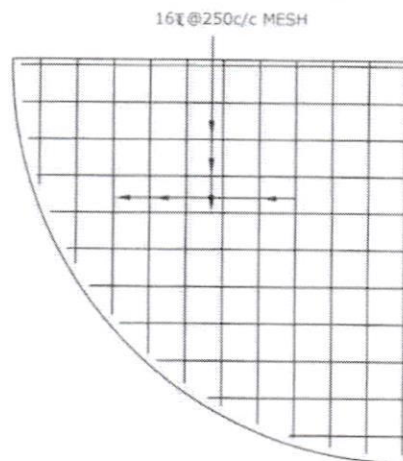

TOP REINFORCEMENT

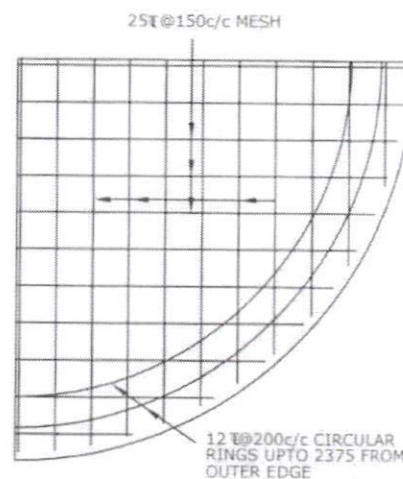

BOTTOM REINFORCEMENT

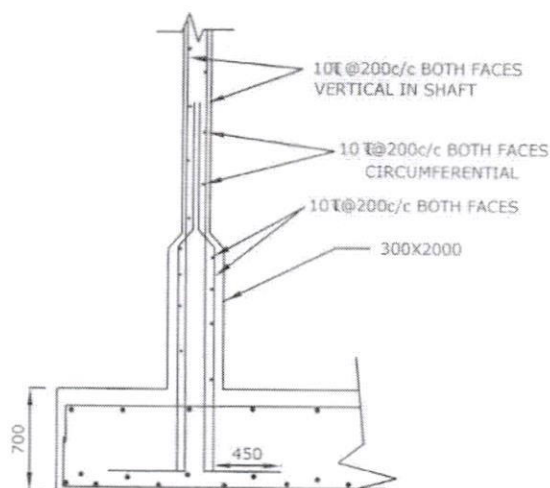

DETAIL 'P'

Asst Executive Engineer

Dy. Executive Engineer

CH. Engineer-II
RWS&S, Gollapudi
Vijayawada.


NOTE:

1. GRADE OF CONCRETE : M30
2. GRADE OF STEEL : Fe415
3. BASIC WIND SPEED : 150 KMPH
4. S.B.C. OF SOIL : 10.0 t/m²
5. DEPTH OF FOUNDATION : 2.5m BELOW GROUND LEVEL UPTO TOP OF RAFT
6. FOR DETAILING OF REINFORCEMENT IS SP-34 SHALL BE FOLLOWED
7. PROVISIONS GIVEN IN IS 456-2000, IS 3370(PART-IV) SHALL BE FOLLOWED
8. PROVIDE SAND FILLING AS PER SITE CONDITION


SCHEME:

40KL- OHBR-30.0M STG


DRG NO:3

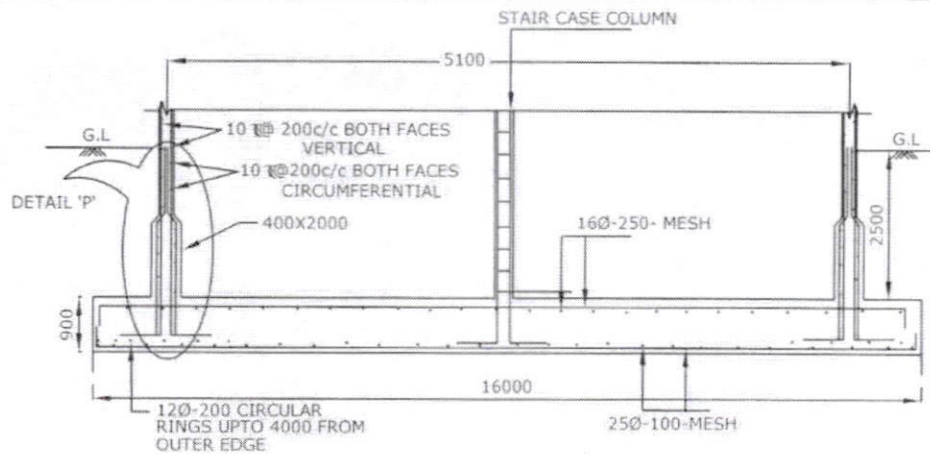


SECTIONAL ELEVATION OF RAFT

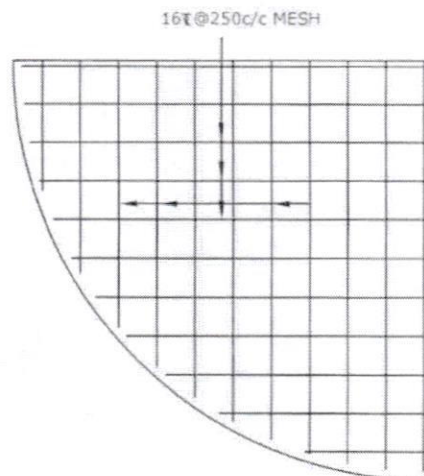

TOP REINFORCEMENT

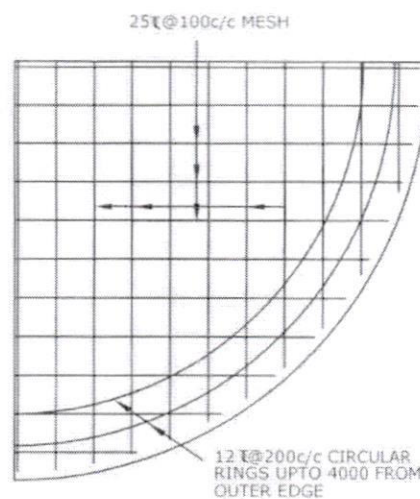

BOTTOM REINFORCEMENT

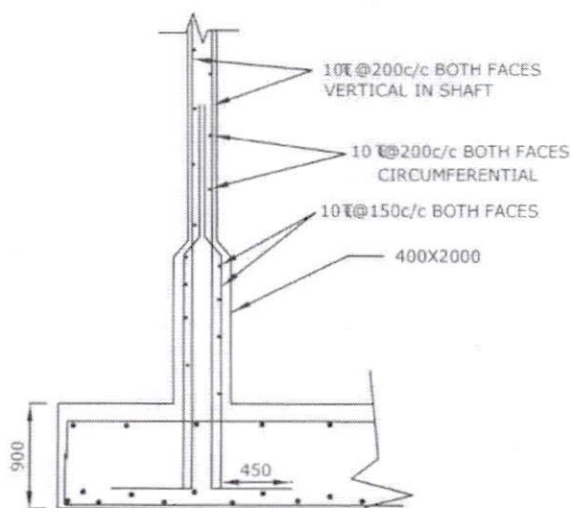

DETAIL 'P'

NOTE:

1. GRADE OF CONCRETE : M30
2. GRADE OF STEEL : Fe415
3. BASIC WIND SPEED : 56 M/sec
4. S.B.C. OF SOIL : 5.0 t/m²
5. DEPTH OF FOUNDATION : 2.5m BELOW GROUND LEVEL UPTO TOP OF RAFT
6. FOR DETAILING OF REINFORCEMENT IS SP-34 SHALL BE FOLLOWED
7. PROVISIONS GIVEN IN IS 456-2000, IS 3370(PART-IV) SHALL BE FOLLOWED
8. PROVIDE SAND FILLING AS PER SITE CONDITIONS

Asst Executive Engineer


Dy. Executive Engineer

Chief Engineer-II
RWSS&S, Gollapudi
Vijayawada.


SCHEME:

40KL- OHBR-30.0M STG


DRG NO:3

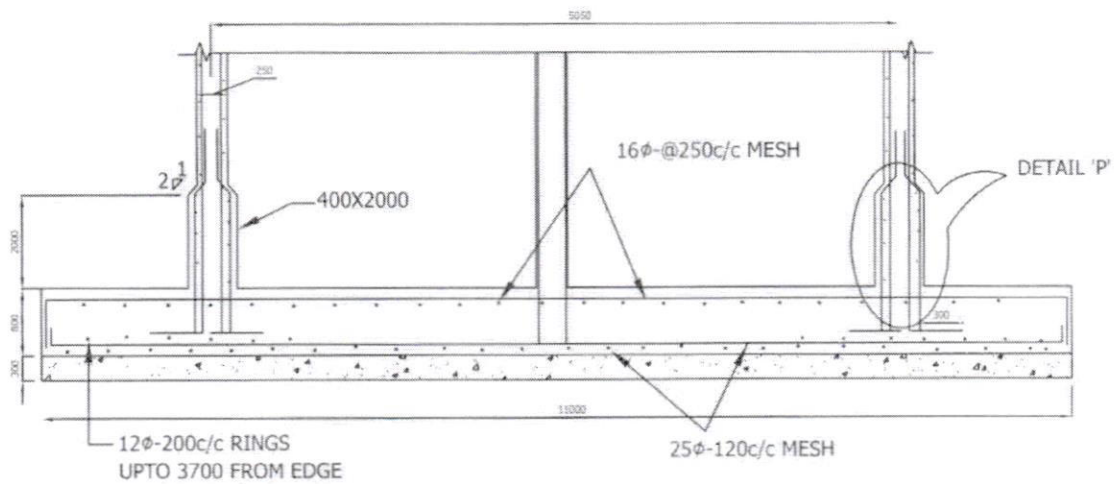


SECTIONAL ELEVATION

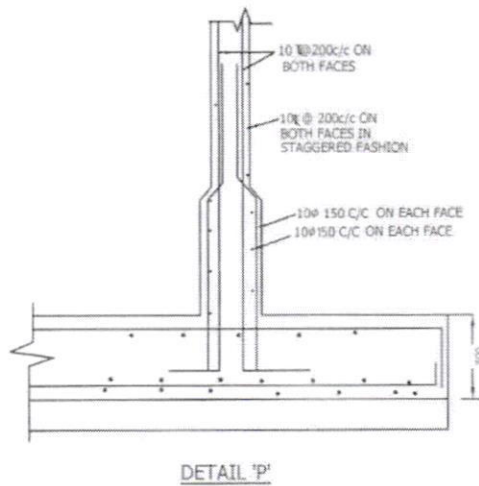

DETAIL 'P'

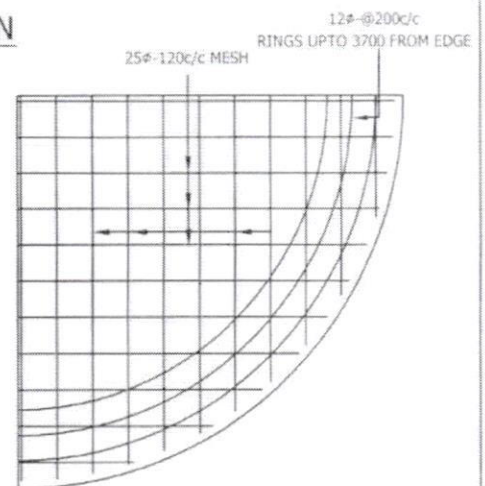

BOTTOM REINFORCEMENT

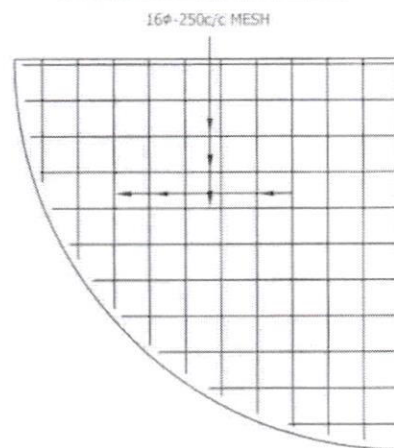

TOP REINFORCEMENT

NOTE:


1. S.B.C. - 10-t/m²
2. WIND SPEED IS 200KMPH
3. GRADE OF CONCRETE M30
GRADE OF STEEL Fe415
4. DETAILING OF REINFORCEMENT SHALL
BE AS PER IS SP-34
5. PROVISIONS OF IS456, IS3370
SHALL BE FOLLOWED

P.R.
Asst Executive Engineer


P.S.
15.2.2019
Dy. Executive Engineer

[Signature]
Chief Engineer-II
RWS&S, Gollapudi
Vijayawada.


SCHEME:
40KL O.H.B.R.
30m staging

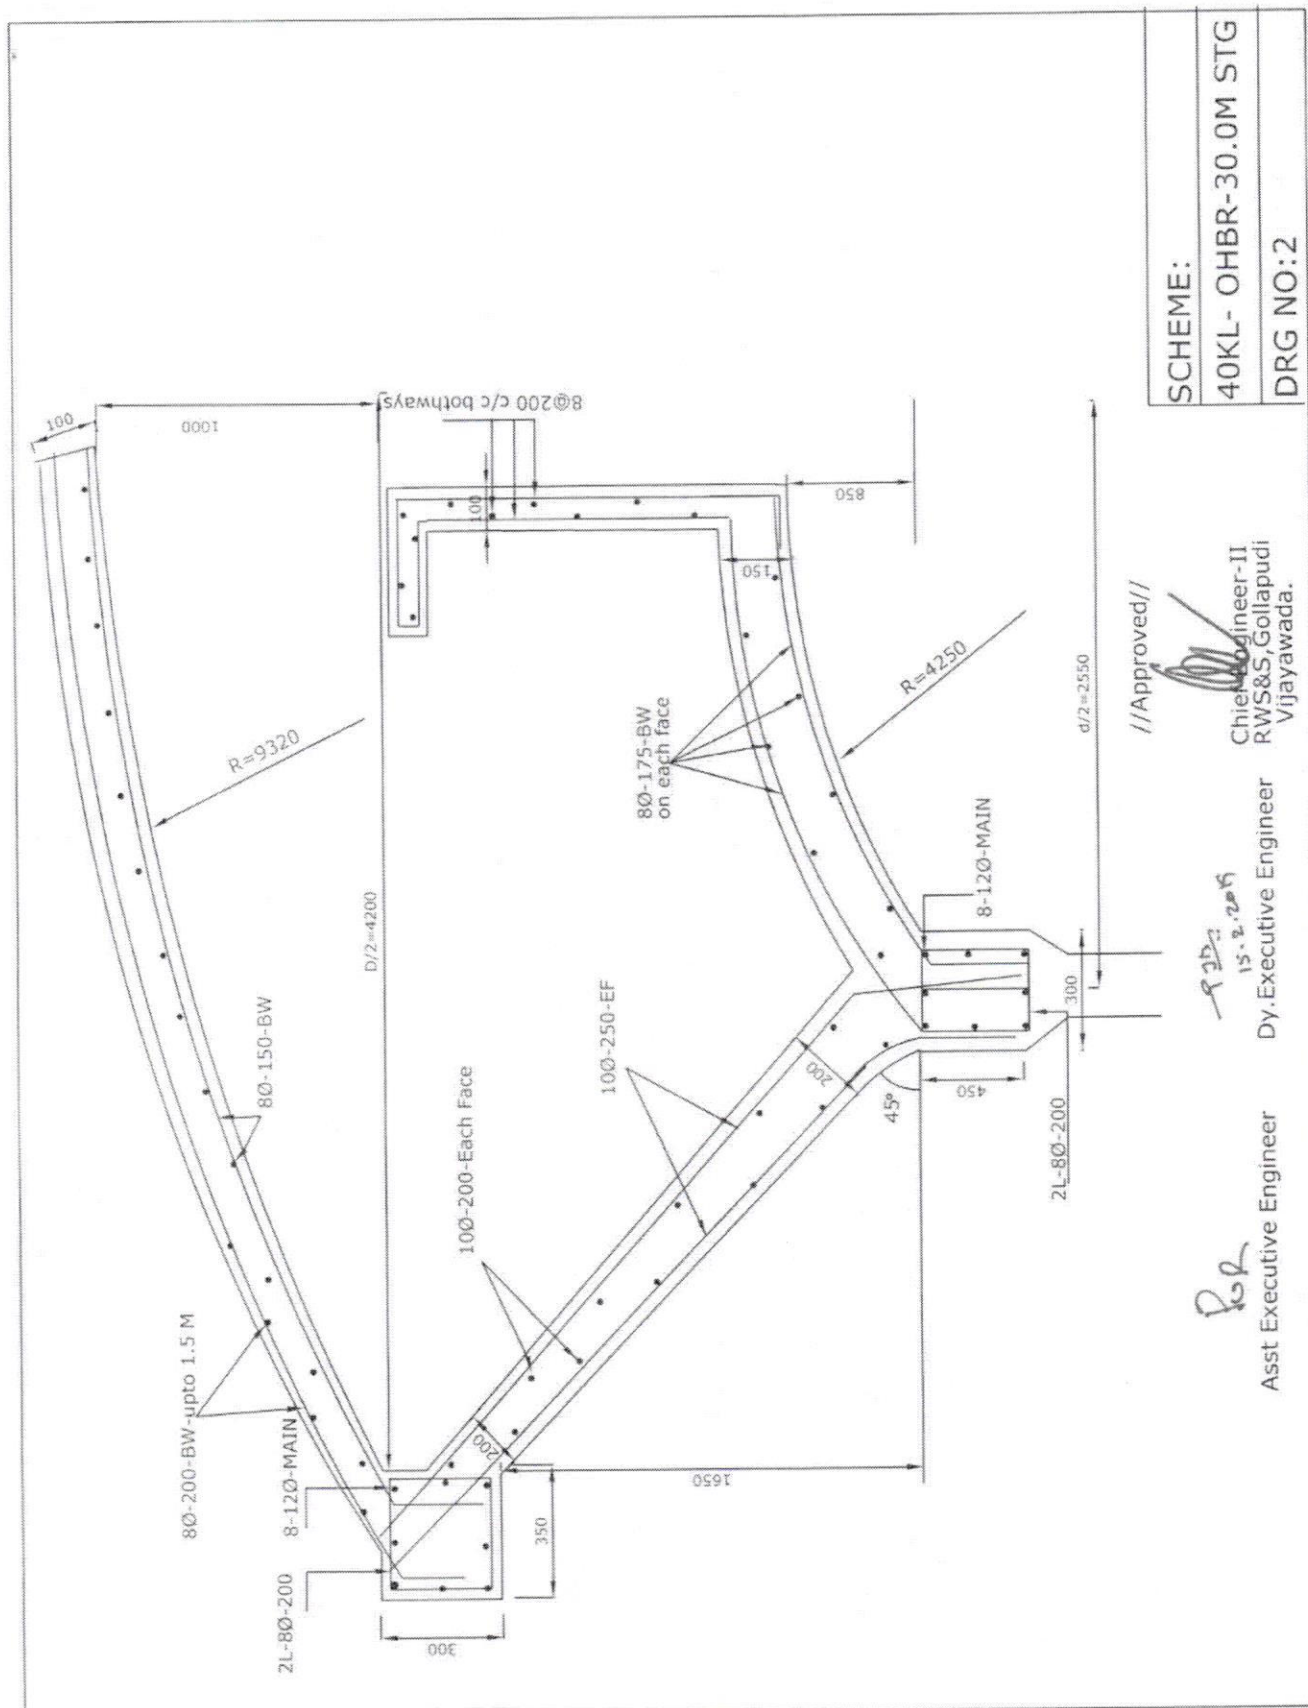


SCHEME:
40KL- OHBR-30.0M STG
DRG NO:2

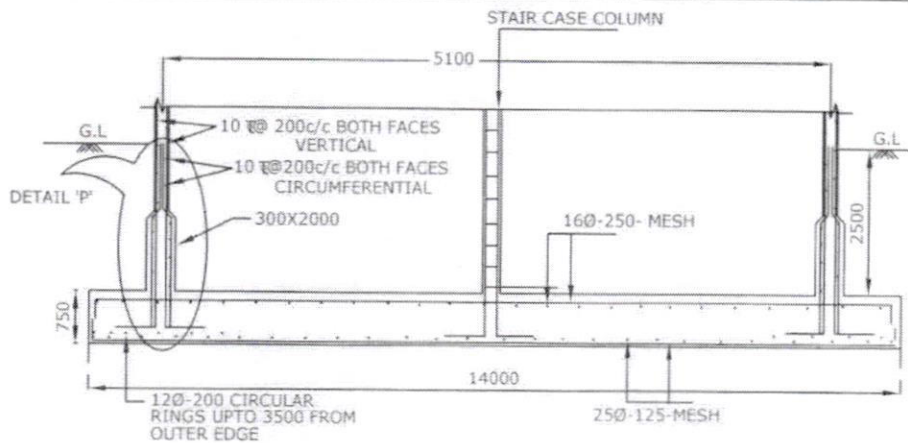


SECTIONAL ELEVATION OF RAFT

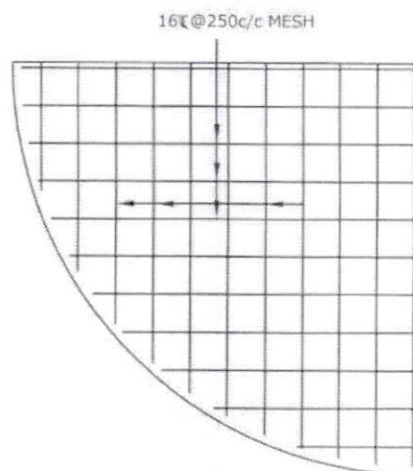

TOP REINFORCEMENT

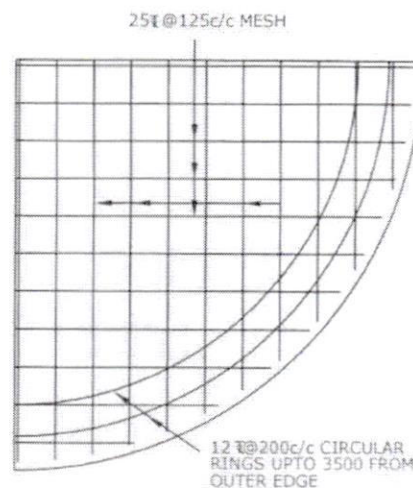

BOTTOM REINFORCEMENT

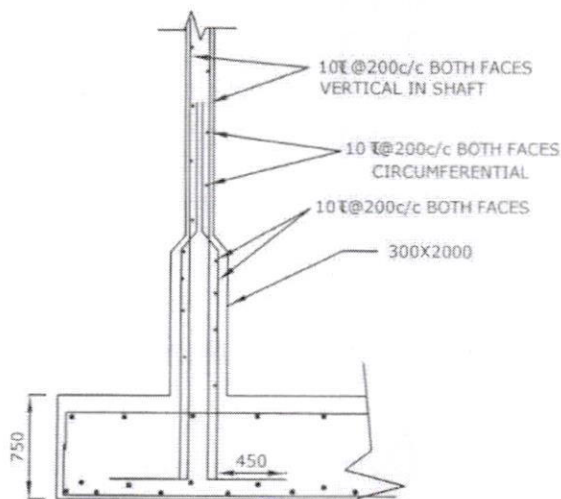

DETAIL 'P'

NOTE:

1. GRADE OF CONCRETE : M30
2. GRADE OF STEEL : Fe415
3. BASIC WIND SPEED : 150 KMPH
4. S.B.C. OF SOIL : 5.0 t/m²
5. DEPTH OF FOUNDATION : 2.5m BELOW GROUND LEVEL UPTO TOP OF RAFT
6. FOR DETAILING OF REINFORCEMENT IS SP-34 SHALL BE FOLLOWED
7. PROVISIONS GIVEN IN IS 456-2000, IS 3370(PART-IV) SHALL BE FOLLOWED
8. PROVIDE SAND FILLING AS PER SITE CONDITION

Approved/f

Chief Engineer-II
RWS&S, Gollapudi
Vijayawada,


Asst Executive Engineer

Dy. Executive Engineer



SCHEME:

40KL- OHBR-30.0M STG


DRG NO:3

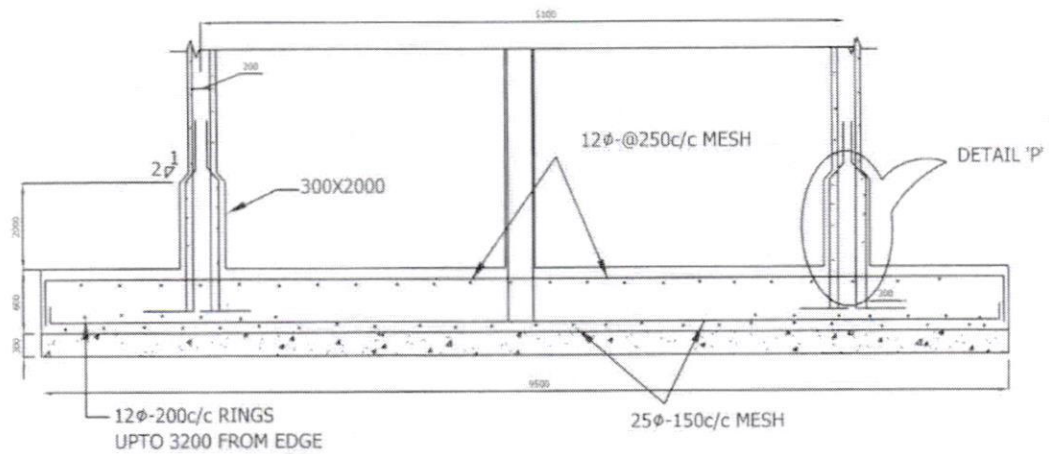

SECTIONAL ELEVATION

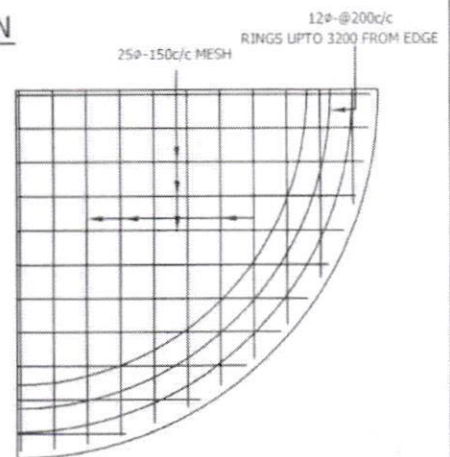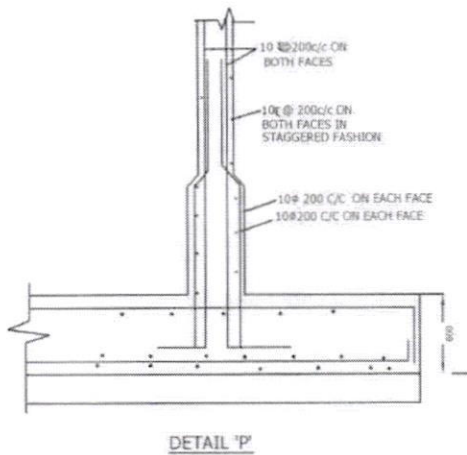

BOTTOM REINFORCEMENT

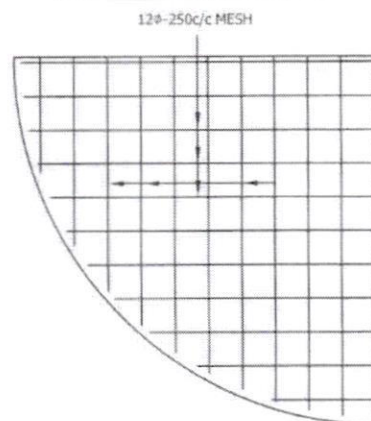

TOP REINFORCEMENT

NOTE:


1. S.B.C. - 10-t/m²
2. WIND SPEED IS 150KMPH
3. GRADE OF CONCRETE M30
GRADE OF STEEL Fe415
4. DETAILING OF REINFORCEMENT SHALL
BE AS PER IS SP-34
5. PROVISIONS OF IS456, IS3370
SHALL BE FOLLOWED


Bm
Asst. Executive Engineer

TJB
15.2.2019
Dy. Executive Engineer


[Signature]
Chief Engineer-II
RWS&S, Gollapudi
Vijayawada.

SCHEME:
40KL O.H.B.R.
30m staging

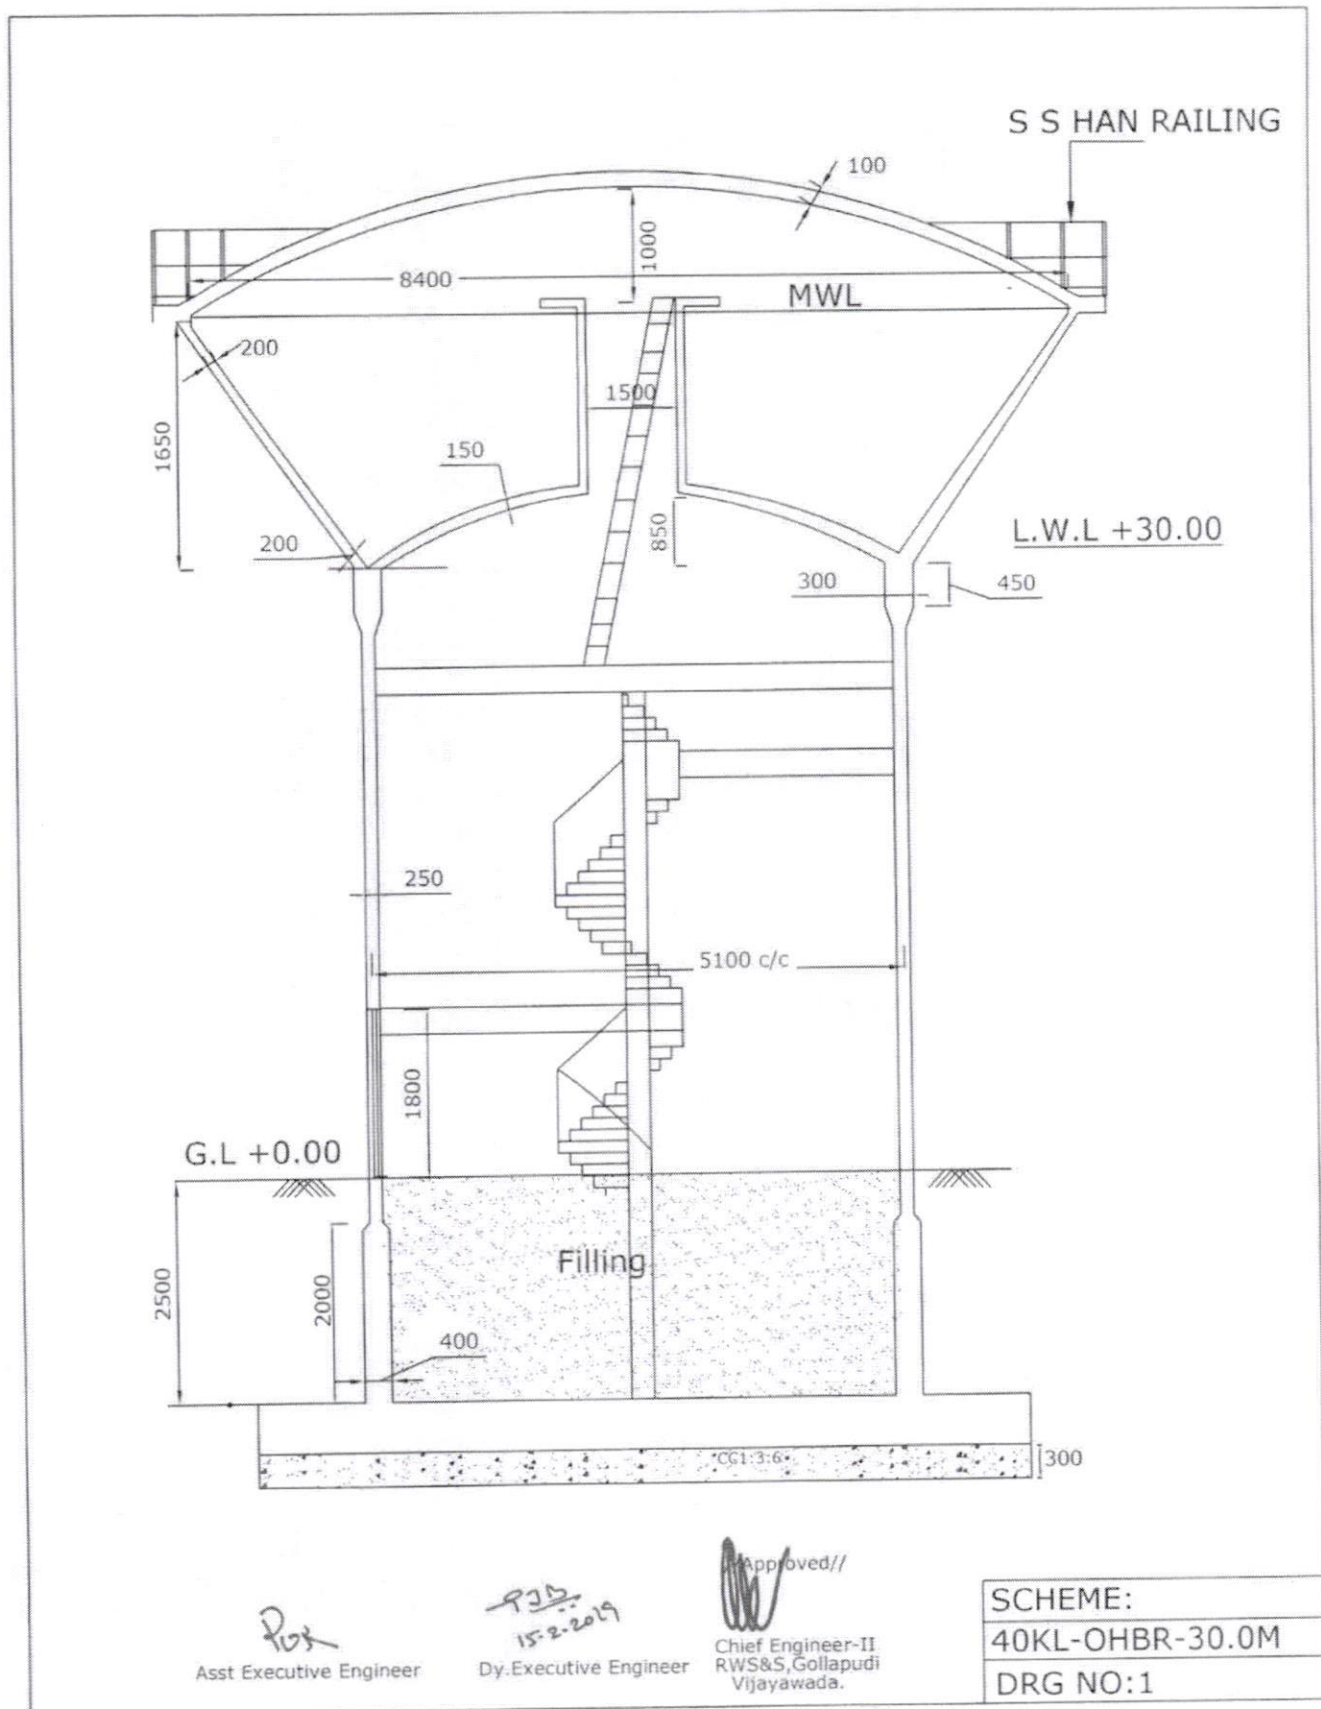


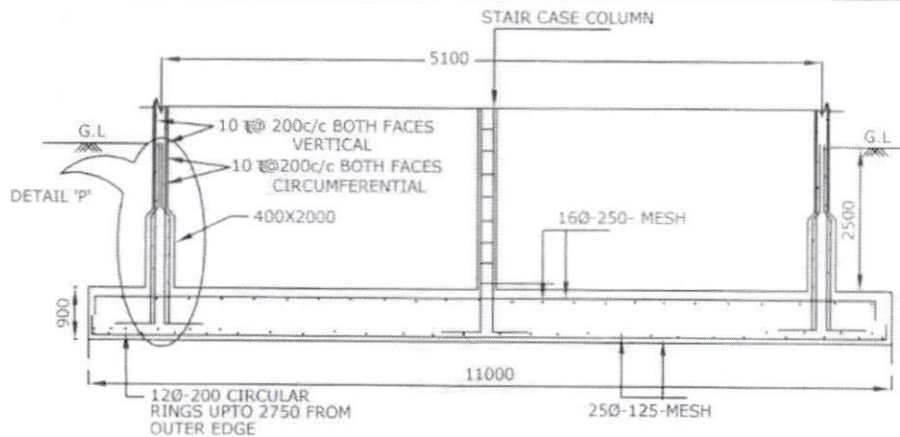


SECTIONAL ELEVATION OF RAFT

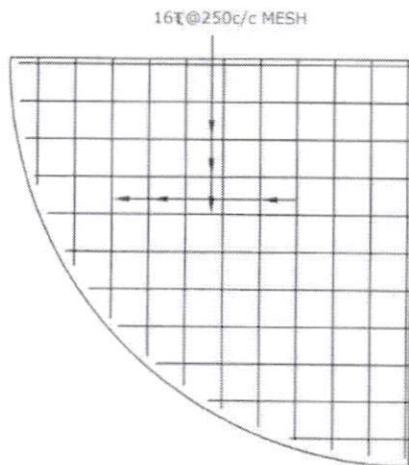

TOP REINFORCEMENT

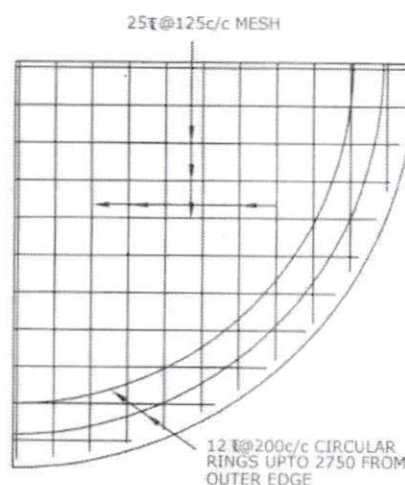

BOTTOM REINFORCEMENT

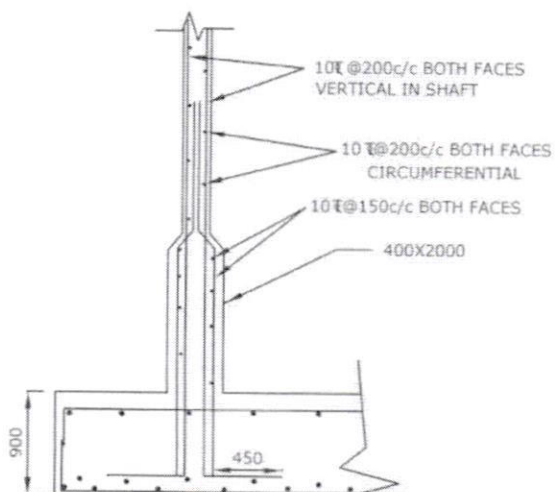

DETAIL 'P'

NOTE:

1. GRADE OF CONCRETE : M30
2. GRADE OF STEEL : Fe415
3. BASIC WIND SPEED : 56 M/sec
4. S.B.C. OF SOIL : 10.0 t/m²
5. DEPTH OF FOUNDATION : 2.5m BELOW GROUND LEVEL UPTO TOP OF RAFT
6. FOR DETAILING OF REINFORCEMENT IS SP-34 SHALL BE FOLLOWED
7. PROVISIONS GIVEN IN IS 456-2000, IS 3370(PART-IV) SHALL BE FOLLOWED
8. PROVIDE SAND FILLING AS PER SITE CONDITIONS

Asst Executive Engineer





Dy. Executive Engineer

Engineer-II
R. V. S. Gollapudi
Vijayawada.

SCHEME:

40KL- OHBR-30.0M STG

DRG NO:3

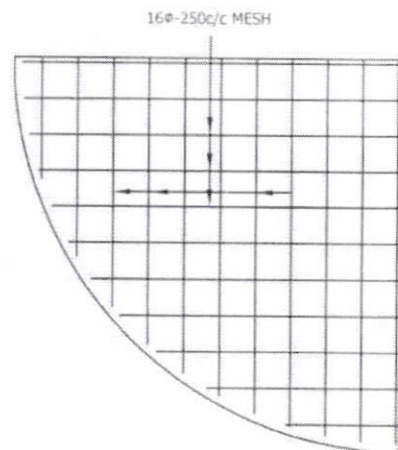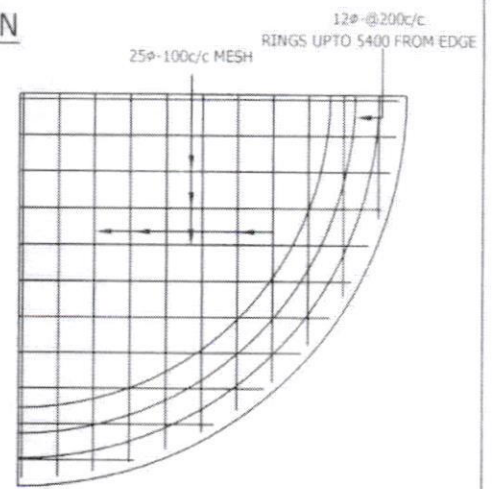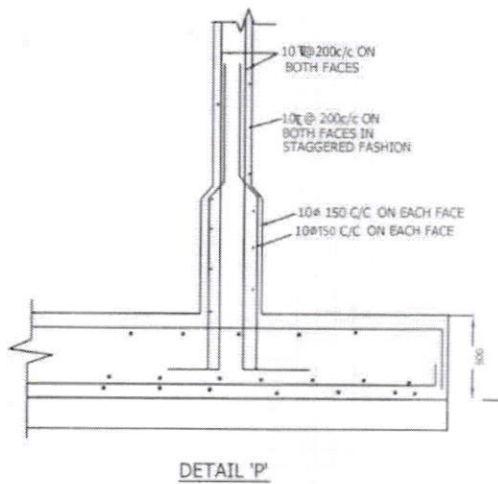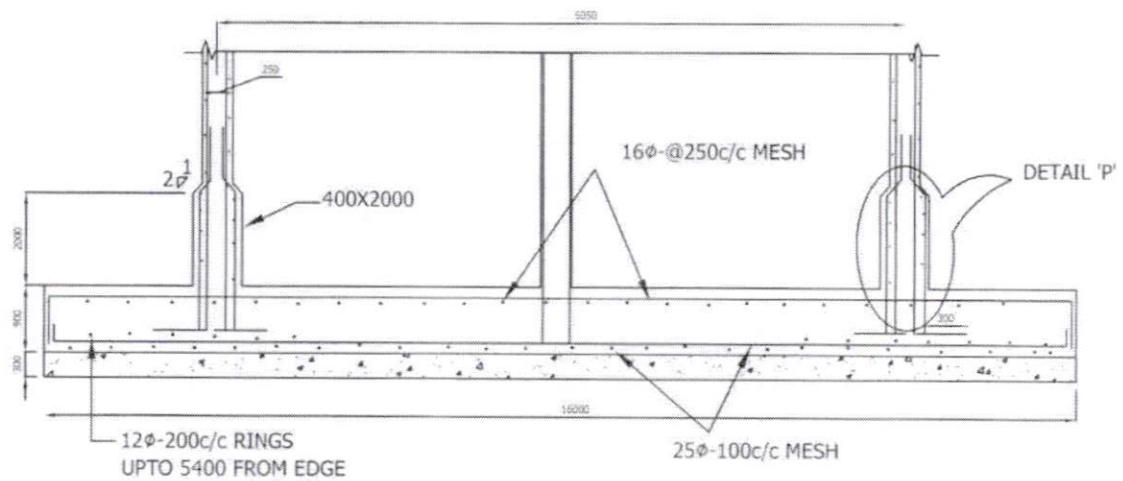

NOTE:

1. S.B.C. - 5-t/m²
2. WIND SPEED IS 200KMPH
3. GRADE OF CONCRETE M30
GRADE OF STEEL Fe415
4. DETAILING OF REINFORCEMENT SHALL
BE AS PER IS SP-34
5. PROVISIONS OF IS456, IS3370
SHALL BE FOLLOWED

Asst Executive Engineer

Dy. Executive Engineer

Engineer-II
RWS&S, Gollapudi
Vijayawada.

SCHEME:
40KL O.H.B.R
30m staging