




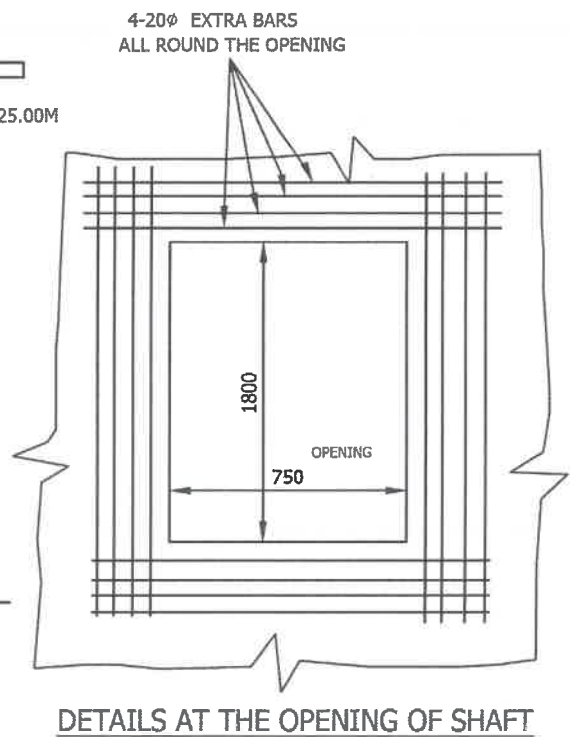


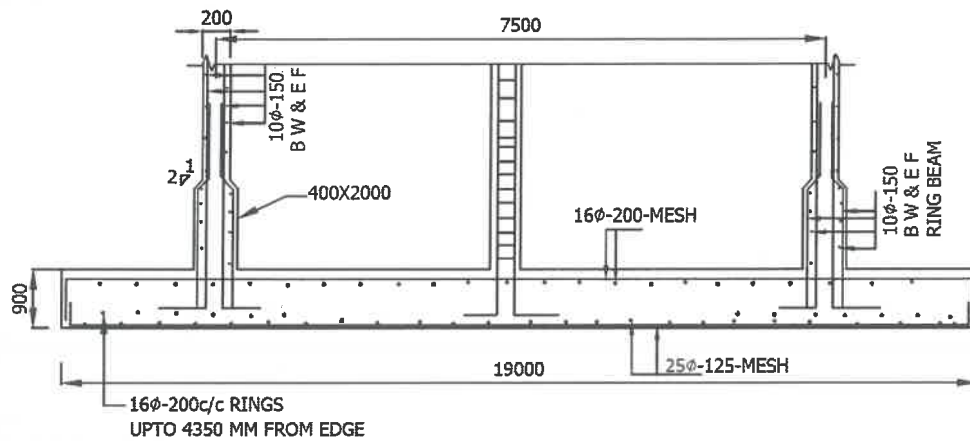

SECTIONAL ELEVATION

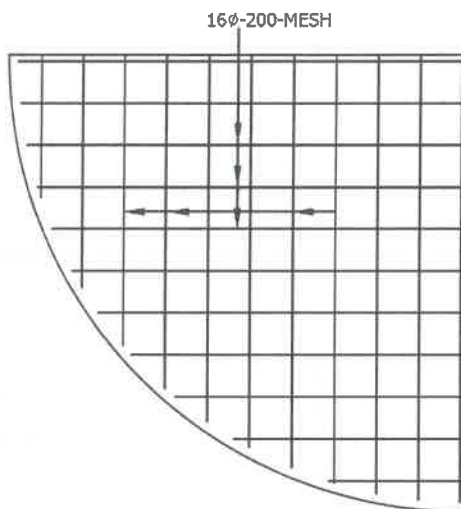

TOP REINFORCEMENT

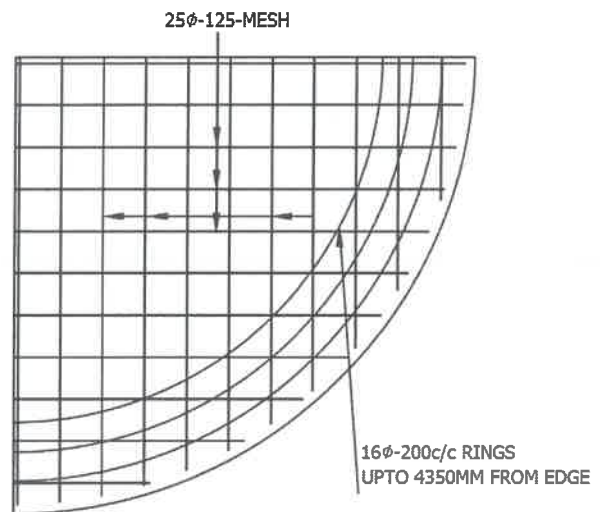

BOTTOM REINFORCEMENT

NOTE:

- 1.GRADE OF CONCRETE : M30
- 2.GRADE OF STEEL : Fe-415
3. BASIC WIND SPEED : 150KMPH
- 4.DEPTH OF FOUNDATION:2.50m BELOW GROUND LEVEL UPTO TOP OF RAFT
- 5.ALL DIMENSIONS ARE IN "MM"
6. S B C OF SOILL-5 T/SQM

Sailaja
AEE

P.R.
DEE

Y.S.
EE


//Approved//

Ry
Chief Engineer-II
RWS&S,Gollapudi
Vijayawada.


SCHEME:

200 K.L OHBR


25.00M STAGING

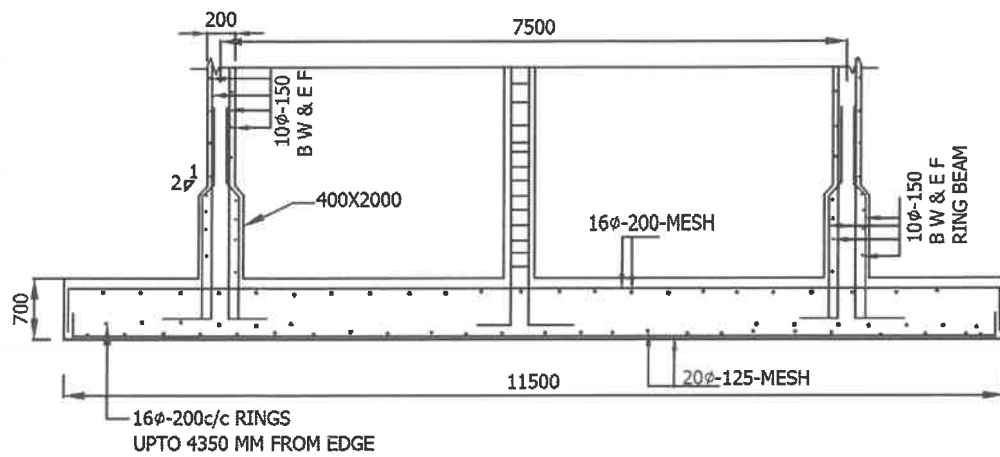

SECTIONAL ELEVATION

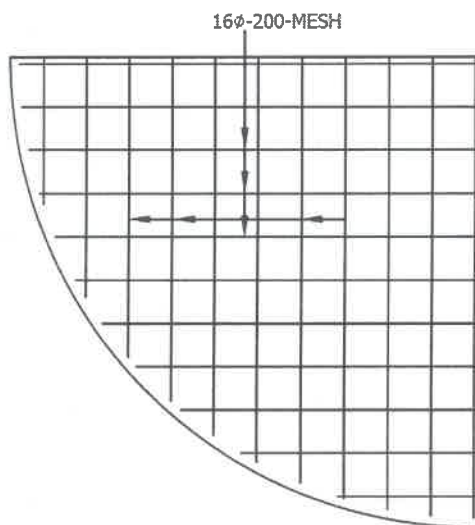

TOP REINFORCEMENT

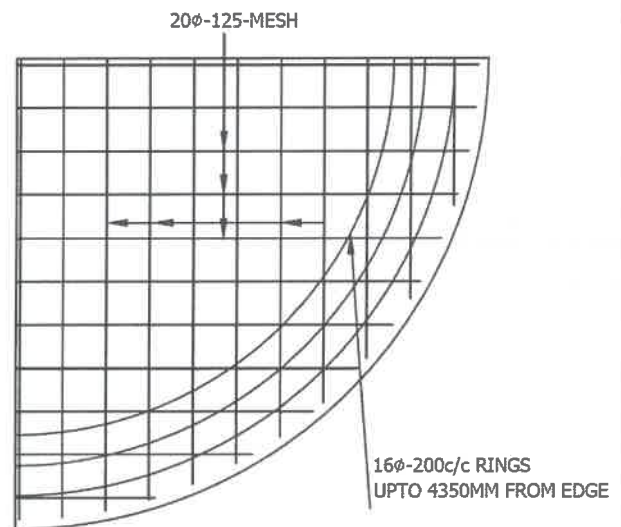

BOTTOM REINFORCEMENT

NOTE:

- 1.GRADE OF CONCRETE : M30
- 2.GRADE OF STEEL : Fe-415
3. BASIC WIND SPEED : 150KMPH
- 4.DEPTH OF FOUNDATION:2.50m BELOW GROUND LEVEL UPTO TOP OF RAFT
- 5.ALL DIMENSIONS ARE IN "MM".
6. S B C OF SOILL-10 T/SQM

Sridhar
AEE

PR
DEE

Y-S
EE


//Approved//

Pr
Chief Engineer-II
RWS&S,Gollapudi
Vijayawada.


SCHEME:

200 K.L OHBR


25.00M STAGING

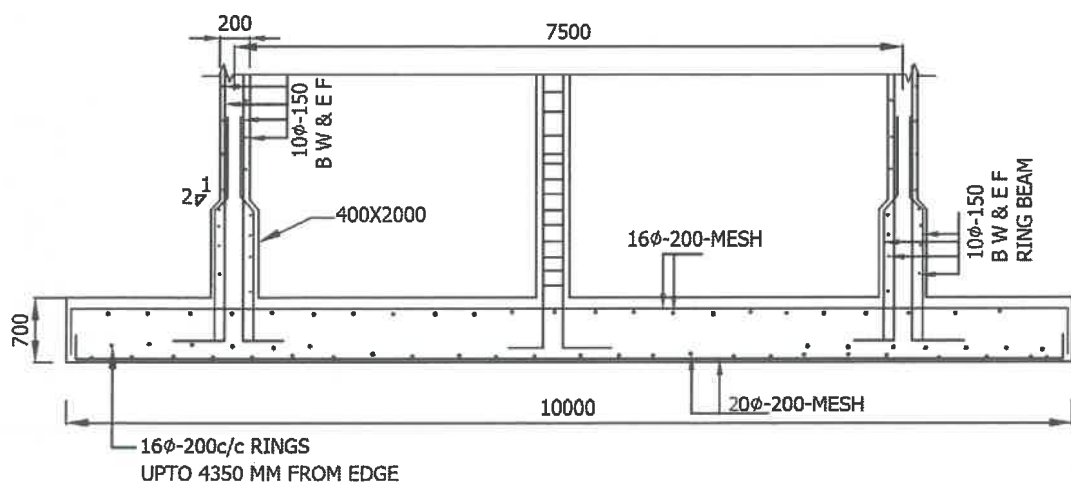

SECTIONAL ELEVATION

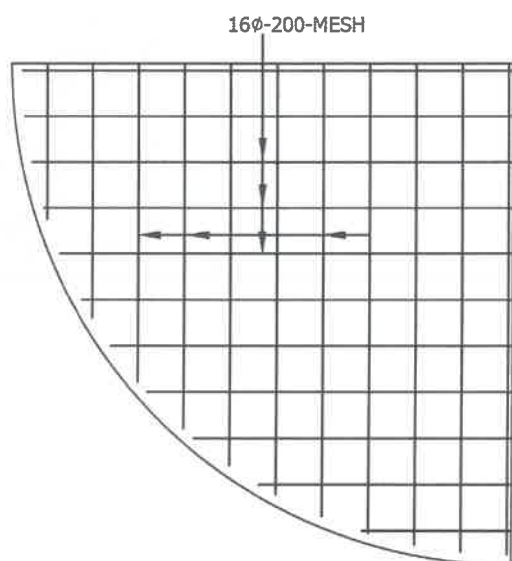

TOP REINFORCEMENT

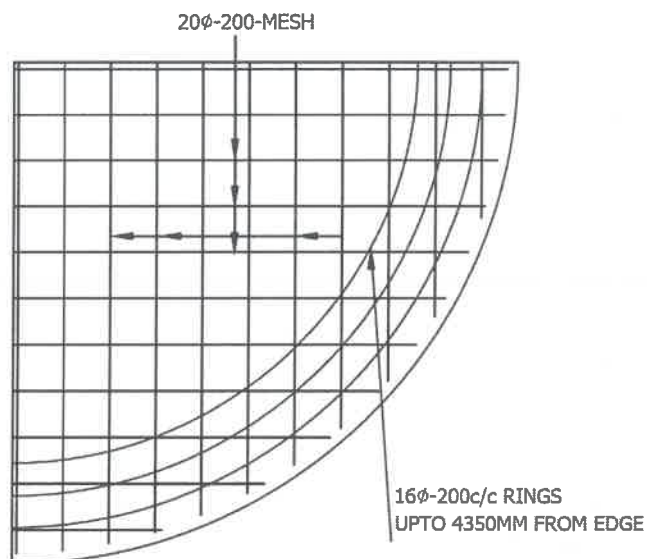

BOTTOM REINFORCEMENT

NOTE:

1. GRADE OF CONCRETE : M30
2. GRADE OF STEEL : Fe-415
3. BASIC WIND SPEED : 150KMPH
4. DEPTH OF FOUNDATION: 2.50m BELOW GROUND LEVEL UPTO TOP OF RAFT
5. ALL DIMENSIONS ARE IN "MM"
6. S B C OF SOILL-15 T/SQM

Salilje
AEE

P.R.
DEE

Y.S.
EE



//Approved//

R.
Chief Engineer-II
RWS&S, Gollapudi
Vijayawada.

SCHEME:

200 K.L OHBR

25.00M STAGING

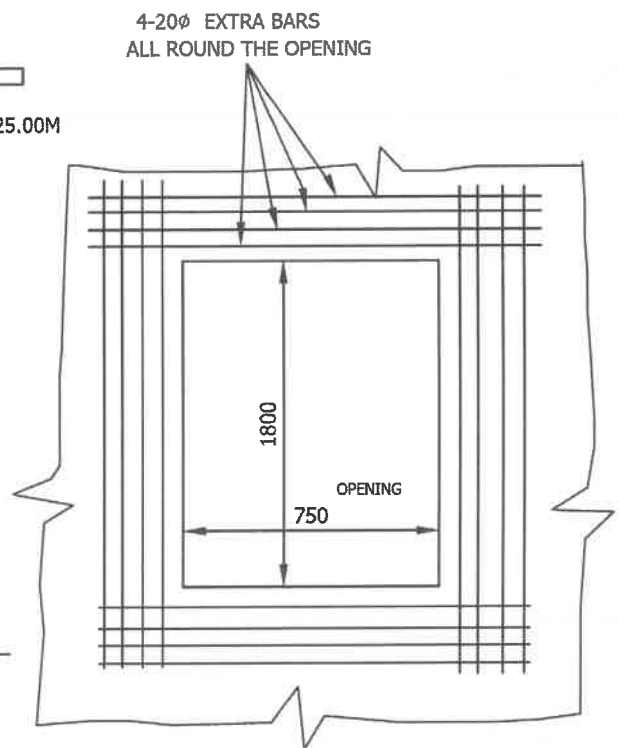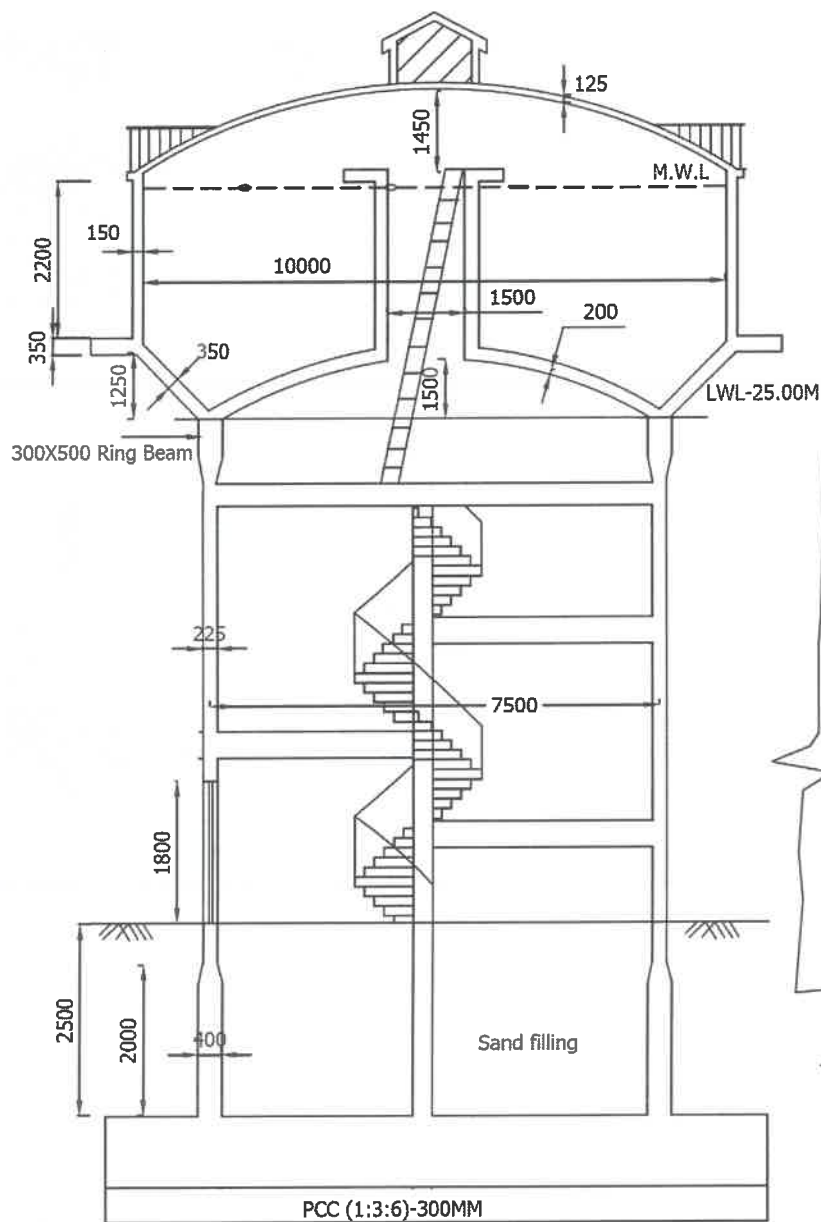

DETAILS AT THE OPENING OF SHAFT

Sailaja
AEE

P.ve
DEE

Y.S
EE


//Approved//

Pr
Chief Engineer-II
RWS&S, Gollapudi
Vijayawada.


SCHEME:

200 K.L OHBR 25.00M STG.


Wind speed - 200 kmph

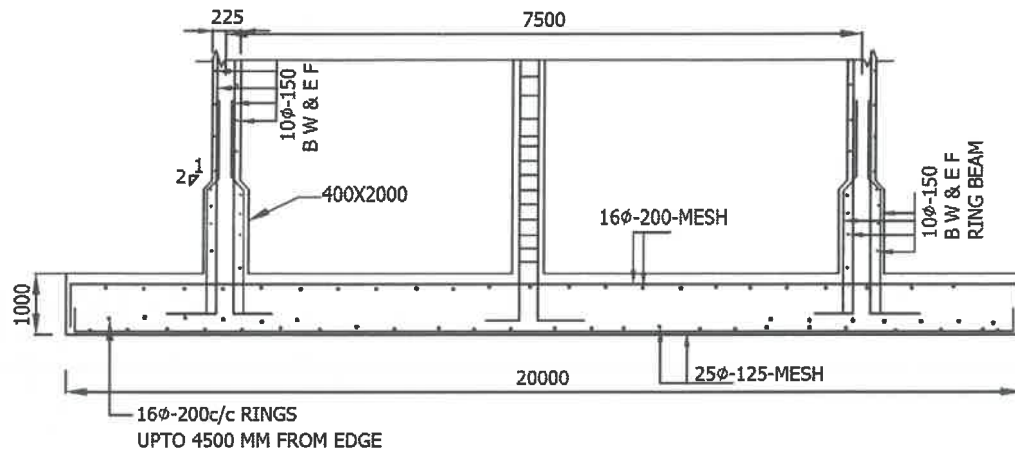

SECTIONAL ELEVATION

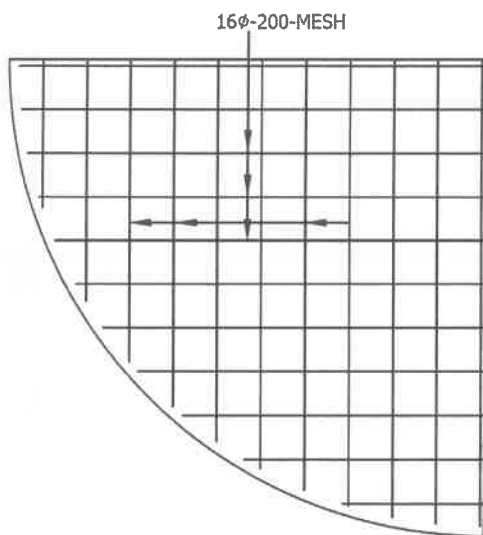

TOP REINFORCEMENT

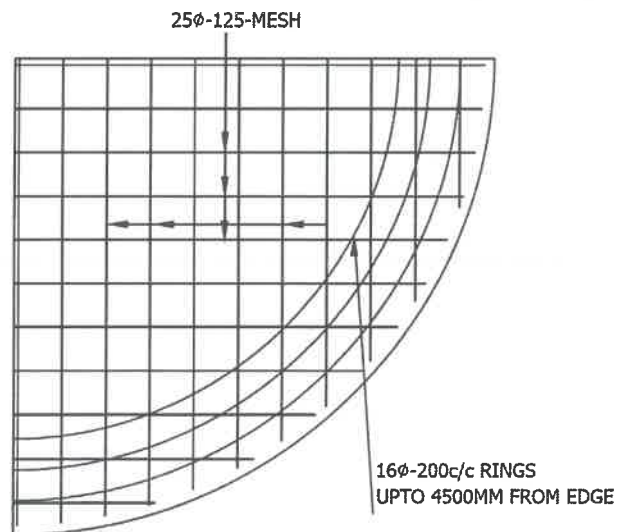

BOTTOM REINFORCEMENT

NOTE:

1. GRADE OF CONCRETE : M30
2. GRADE OF STEEL : Fe415
3. BASIC WIND SPEED : 200KMPH
4. DEPTH OF FOUNDATION: 2.50m BELOW GROUND LEVEL UPTO TOP OF RAFT
5. ALL DIMENSIONS ARE IN "MM"
6. S B C OF SOILL-5 T/SQM

Sailaj
AEE

Por
DEE

Y.S
EE


//Approved//

Ri
Chief Engineer-II
RWS&S, Gollapudi
Vijayawada.


SCHEME:

200 K.L OHBR


25.00M STAGING

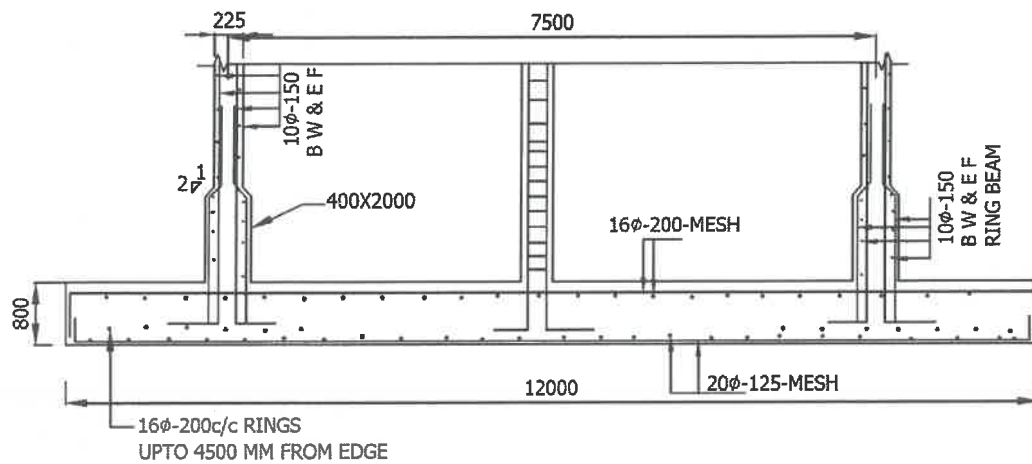

SECTIONAL ELEVATION

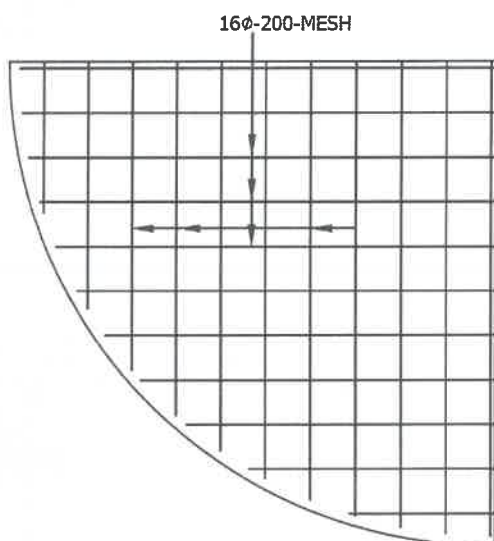

TOP REINFORCEMENT

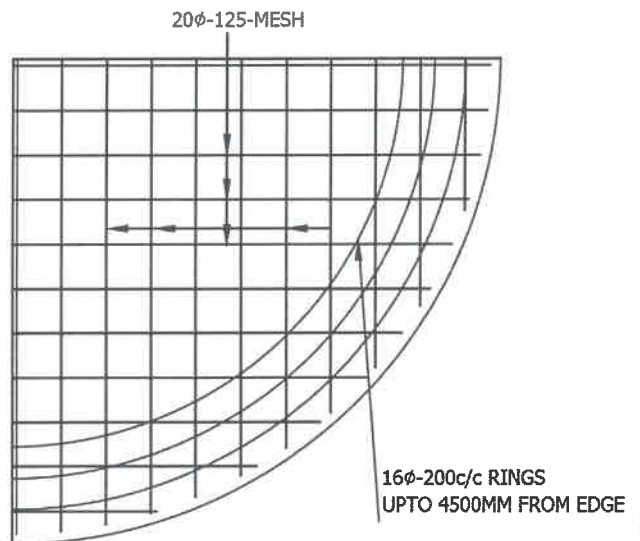

BOTTOM REINFORCEMENT

NOTE:

1. GRADE OF CONCRETE : M30
2. GRADE OF STEEL : Fe415
3. BASIC WIND SPEED : 200KMPH
4. DEPTH OF FOUNDATION: 2.50m BELOW GROUND LEVEL UPTO TOP OF RAFT
5. ALL DIMENSIONS ARE IN "MM"
6. S B C OF SOILL-10 T/SQM

Sailaja
AEE

Pon
DEE

Y-S
EE


//Approved//

[Signature]
Chief Engineer-II
RWS&S, Gollapudi
Vijayawada.


SCHEME:

200 K.L OHBR


25.00M STAGING

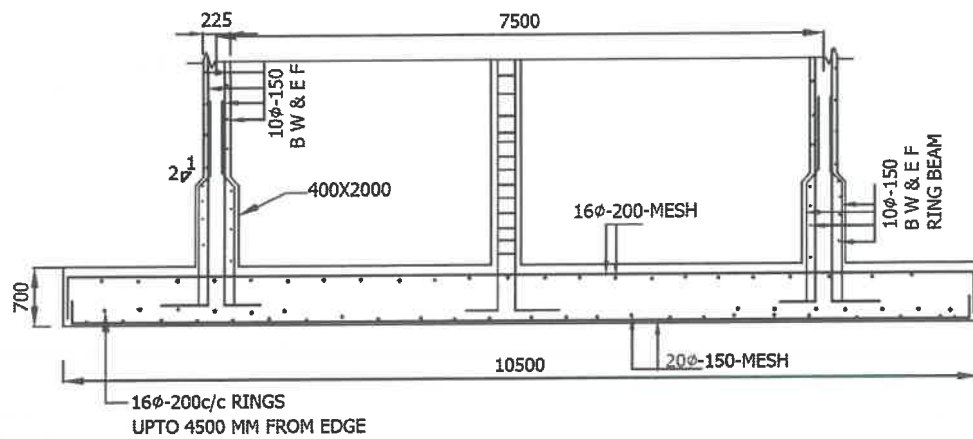

SECTIONAL ELEVATION

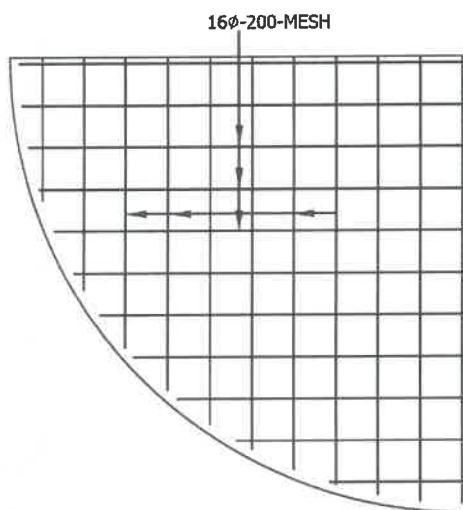

TOP REINFORCEMENT

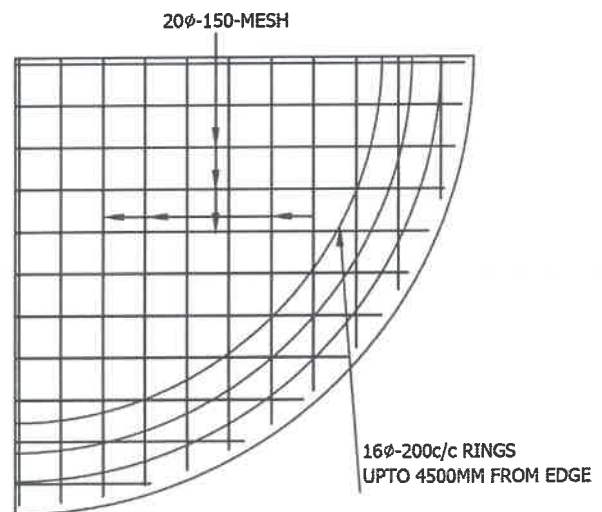

BOTTOM REINFORCEMENT

NOTE:

- 1.GRADE OF CONCRETE : M30
- 2.GRADE OF STEEL : Fe415
3. BASIC WIND SPEED : 200KMPH
- 4.DEPTH OF FOUNDATION:2.50m BELOW GROUND LEVEL UPTO TOP OF RAFT
- 5.ALL DIMENSIONS ARE IN "MM"
6. S B C OF SOILL-15 T/SQM

Seilg
AEE

Por
DEE

Y-S
EE

//Approved//

P
Chief Engineer-II
RWS&S, Gollapudi
Vijayawada.

SCHEME:

200 K.L OHBR

25.00M STAGING